

DESCRIPTION

The Milton Roy Model SC4200 Streaming Current Detector (SCD) is an online electrokinetic charge analyzer that measures the net ionic and particle surface charge in a chemically treated water or wastewater sample. The SCD allows continuous monitoring and control of the coagulation process, thereby providing:

- Consistent water quality
- Uniform chemical dosing under varying conditions
- Reduced chemical costs
- Reduced manual supervision and/or automatic operation of the treatment process




The SC4200 offers users advanced technology to monitor Streaming Current to improve treatment processes. The SC4200's electronics, sampling system and overall design are the direct result of years of studies and research and development aimed at advancing the technology. Though SCD's have been an accepted part of water treatment for more than a decade, the SC4200 incorporates a number of key improvements that provide even greater stability, response, and improved operation over previous successful designs.

In addition, the SC4200 is specifically designed to operate in wastewater treatment. Special probe designs and electronic advances have opened the door to controlling coagulant feed to belt presses, centrifuges, and other dewatering equipment.

JET WASH SAMPLE CELL CLEANING

The Automatic Jet Wash is an optional patented sample cell cleaning system available on Milton Roy SCD's. The system is designed to maintain cell cleanliness and signal reliability by automatically flushing the sample cell on a predetermined cycle. Flushing is accomplished by injecting water at a high velocity through the bottom of the sampling cell, which scours the cell surfaces and forces contaminants into the sample stream drain. Cleaning frequency is field adjustable to suit the application. Signal output is automatically locked during the cleaning cycle to ensure control stability.

SC4200 MODEL SELECTION GUIDE

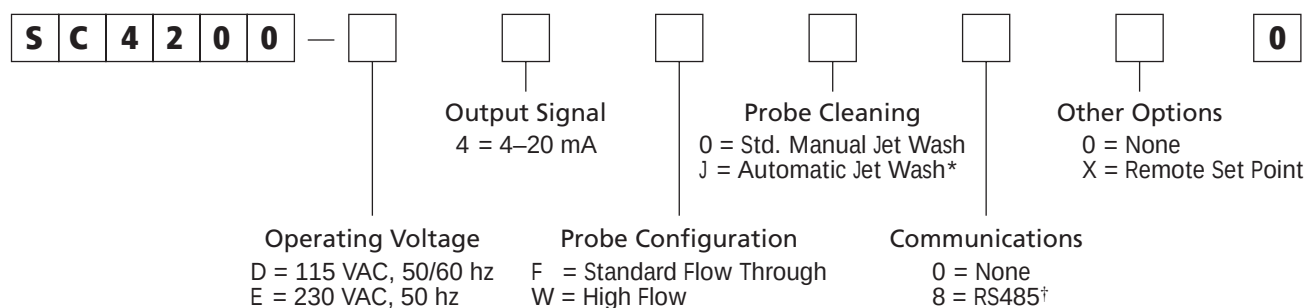

* Automatic Jet Wash is factory set at 30 seconds every 2 hours. Jet Wash timing is field adjustable. Available settings are 30 seconds to 7 minutes (30 second intervals) every 15, 30, or 45 minutes or 1, 2, or 4 hours.

SC4200

STREAMING CURRENT DETECTOR

SC4200 SPECIFICATIONS

Power Required	115 VAC, 50/60 hz (standard) 230 VAC, 50 hz (optional)
Instrument Output	Two 4-20 mA Streaming Current Signals: 1 factory calibrated output; 1 customer calibrated output (max. 500 OHM load each)
Meter Readout	Digital: -100 to +100 SC Units
Operating Modes	Calibration and Run mode selectable
System Accuracy	1% of full scale
Response Time	Less than 5 seconds
Gain Adjustment	Full range continuous from 1-10 on front panel; additional internal adjust
Zero Adjustment	Full range
Signal Filter	Adjustable low pass
Sample Cell	Flow through, external type, Manual Jet Wash conn. (std); Automatic Jet Wash System (opt)
Sample Flow Rate	Standard probe: 2-4 L/min (0.5-1 gal/min) High flow probe: 4-20 L/min (1-5 gal/min)
Sample Flow Sensor	Optional, consult Milton Roy
Sample Wetted Parts	PVC, Delrin, PTFE, & Silver
Sample Connections	Barb Type, 1/2" ID tube (standard) Barb Type, 1" ID tube (high flow)
Alarms	High and Low adjustable Relays: SPST, 0.4 amps at 115 VAC
Operating Temp	32° F to 120° F (0 C to 50° C)
Enclosure	NEMA 4X, 316 Stainless Steel
Weight	24 lbs.
Remote Display Option	RC7200 Remote Controller Station (accepts 4-20 mA signal from SC4200 via 2 wire, twisted pair 22 AWG); max 3000 ft. separation

FEATURES

- Digital LCD display, -100 to +100 Streaming Current Units
- Full range Zero, Gain, and Filter adjustments
- High and Low alarms
- Calibration or Run mode selectable
- Dual 4-20 milliamp Streaming Current outputs
- Robust industrial design, including 316SS enclosure
- Advanced probe design featuring high flow to 5 GPM
- Advanced electronics; patented "Phase Correction" circuitry
- Standard manual Jet Wash bottom flush connection
- Compatible with Milton Roy RC7200 Controller or other PID controllers for closed loop automatic control

All information contained herein subject to change without notice.

Literature #PD 1042 SC • Rev 9/2022

©2021 Milton Roy, LLC. All rights reserved.

SC4200 DIMENSIONS

