

PROTEUS® Series

Metering Pumps



PROTEUS Series

The Intelligent Metering Pump

PROTEUS® Metering Pump

PROTEUS® METERING PUMP


Engineered to meet today's most demanding standards for accuracy, reliability, and process control flexibility, PROTEUS is not just another metering pump, but one built using the latest technology for the most demanding applications.

Milton Roy designed the PROTEUS series from the ground up based on valuable feedback received from water treatment operators, industry experts, and maintenance personnel.

The PROTEUS metering pump features a variable speed drive allowing full control of the stroke profile for maximum control of the chemical going into your process. In addition, it also features a wide variety of control options that are easily configured using the intuitive user interface and full color LCD display.

Whatever your application, the PROTEUS metering pump is ready to be your go-to solution for your most demanding applications.

PROTEUS Performance Chart

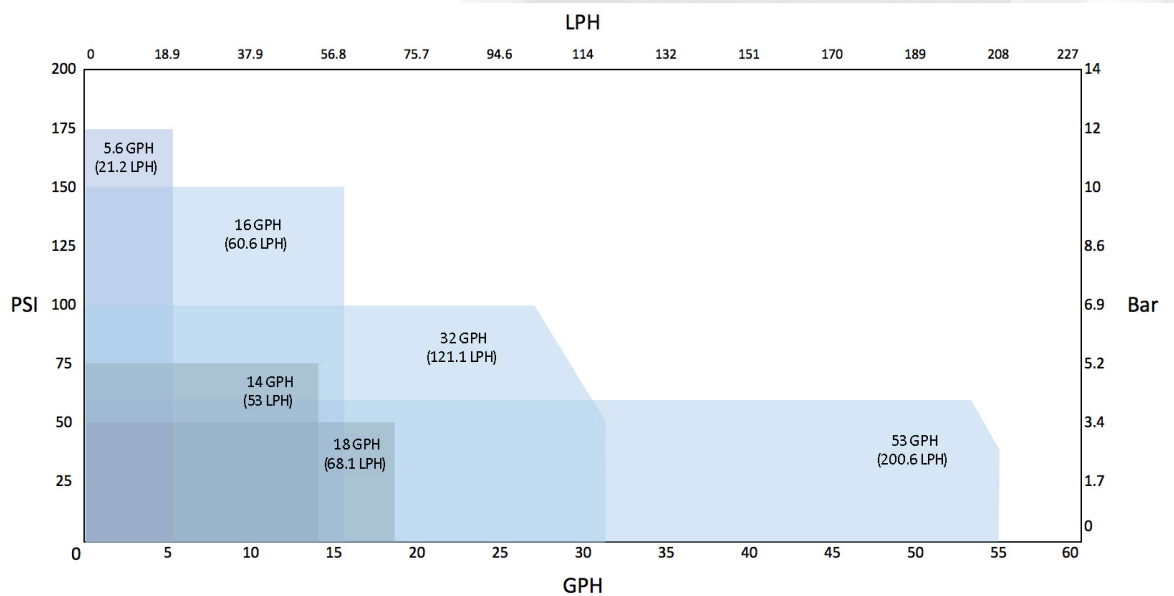

Expanded Features:

- **Maximum flow range** from 5.6- 53 GPH (21.2 - 200 LPH) available for added control over your process with 1000:1 turndown ratio.
- **Effective metering range** from .006 GPH (.023 LPH) up to 53 GPH (200 LPH) depending on model
- **StayPrime™ Degassing Technology** mitigates the risk of losing prime by automating a priming cycle after a preset amount of pump idle time.
- **Alarm Log** to keep track of the date and time when any alarms occur.
- **Digital Input Configuration** more flexible with a user defined option for accessories



Valued reputation

At Milton Roy, we take pride in the relationships we've built and the partnerships we've formed. We work hard every day to earn the trust and confidence of our customers. We believe it's this reputation that sets us apart from the competition. Our goal is to manufacture world-class pumps and accessories and to respond to our customers' needs with a sense of urgency and mutual respect. Year after year, we continue to build more than just great pumps!

Culture of reliability

With 80+ years of industry excellence, Milton Roy continues to build superior products to meet our customers' toughest metering pump applications. Milton Roy consistently delivers the most reliable, competitive range of metering pumps on the market today. Our professional and experienced research and development team continues to make huge strides in innovation for tomorrow.

Our global network

With strategically located manufacturing sites and channel partner experts to support you globally, Milton Roy is with you wherever you are. Visit us online at miltonroy.com to find your local authorized representative.

Our commitment to quality

Milton Roy is committed to delivering products of the highest quality standards to our customers. This commitment begins with a culture to continually improve our products and processes by implementing a quality management program based on best practices. Because of this commitment, Milton Roy's pumps are the most reliable and well regarded pumps on the market.

Easy model selection

Selecting the right pump just got easier. No complicated configurations are necessary to find the right pump. With the Manual, Enhanced, and Communications models offered, simply pick the features that fit your needs (see page 6 for a complete list). Our models offer a wide range of functionality including backlit display, multilanguage, and 2-way communication to name only a few.



Pictured: Communications model

Features and Benefits

Milton Roy is setting the standard for accuracy and reliability

Milton Roy continues its commitment to innovation and technological advances with the expansion of the PROTEUS Metering Pump. Designed to meet the most challenging application needs, the PROTEUS metering pump brings a new level of accessibility and performance to the field.

A valued product offering:

- PROTEUS series flow rates extend from 0.006 to 53 GPH (0.023 to 200.6 l/hr)
- Mechanically actuated diaphragm for years of reliable service
- +/- 1% steady state accuracy over 1000:1 turndown ratio



Certified to
NSF/ANSI 61 & 372



Efficient mechanically actuated diaphragms

Maximum evacuation on every stroke regardless of capacity setting

Consistent Footprint Across Models

While Proteus has 6 different capacity configurations, all have the same dimensional footprint which makes it easy for mechanical designers to place on skid systems

Upgraded easy-to-use operation interface

Backlit color display and enhanced settings enable maximum application customization

Rugged construction

Upgraded NEMA 4X/IP 65 housing and protective cover for the harshest environments

Input/Output

- See page 6 for full range of inputs and outputs based on model

Remote connectivity

Control and feedback in real time

- Enhanced model - Multiple methods of connection to process control signals whether analog or digital

Universal power supply

Providing maximum flexibility

Modbus RTU or Profibus DP enabled

For 2-way communication

Programmable Outputs

Dedicated communication

Programmable Input(s)

Dedicated communication



Pictured: Communications model

Multilanguage, user-friendly navigation

PROTEUS's backlit color display allows for convenient navigation in five languages: English, French, Portuguese, Spanish, and Chinese. The enhanced control version is ready for digital or analog control interface and an extensive variety of inputs and outputs for various digital and analog devices. The PROTEUS Communications model offers Profibus DP and Modbus RTU communications protocols to enable communication with many devices connected to the same network. PROTEUS provides everything you need to assure you have complete control of your process.

Innovative Drive System

By using a variable speed, stepper motor drive, the PROTEUS pump is able to achieve $\pm 1\%$ steady state accuracy over 1000:1 turndown ratio by controlling the stroke profile. As a result, the PROTEUS provides consistent operation and greater flexibility for handling different chemicals from sodium hypochlorite to polymers and other viscous fluids. When the PROTEUS is activated it is always discharging chemical except during the brief suction stroke.


Traditional On/Off Dosing Pump vs PROTEUS



Slow Mode



In applications where chemicals, such as peracetic acid, are sensitive to suction stroke-speed due to high viscosity or degassing characteristics, PROTEUS features "Slow Mode". Slow Mode allows the user to slow the suction stroke of the pump. This provides better high viscosity fluid handling for applications where a quick suction stroke isn't ideal. Engaging Slow Mode reduces the overall output capacity of the pump due to elongating the suction stroke duration and is user configurable from 10% to 90% settings.

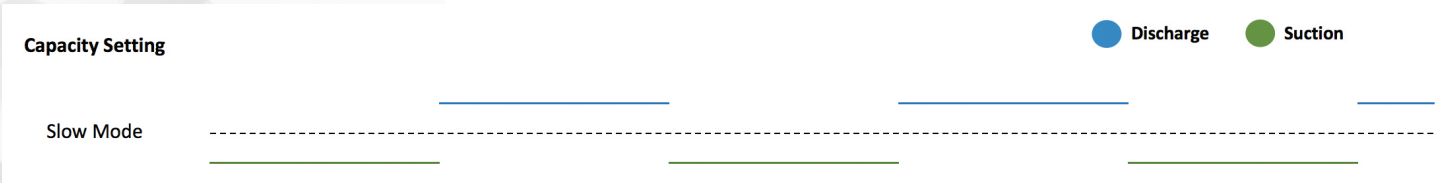

Features and Benefits

Electronic control by model

Control Version

Manual model
Enhanced model
Communications model

User Interface			
Four Color Backlit graphical display	●	●	●
Flow rate or volume display (GPH, L/hr)	●	●	●
Capacity setting display	●	●	●
Start/Stop button	●	●	●
Mode/Select button	●	●	●
Full capacity (100%) button	●	●	●
Prime button	●	●	●
Active operation mode indication on display	●	●	●
Active alarm indication on display	●	●	●
Calibration status indication on display	●	●	●
Operation Modes			
Manual (Internal)	●	●	●
Analog [0/4-20 mA] (External)		●	●
Pulse [volume/pulse] (External)		●	●
Batch (External)		●	●
Cycle Timer (Internal)		●	●
Timed event (Internal)		●	●
Control Input			
Programmable digital contacts	1	4	4
User 1		●	●
User 2		●	●
User 3		●	●
Single level float switch	●	●	●
Dual low level float switch		●	●
Pulse control		●	●
Remote start/stop	●	●	●
Remote internal/external mode selection		●	●
Programmable analog inputs	0	2	2
Pacing		●	●
Tank level		●	●
Control Protocol			
Modbus RTU*			●
Profibus DP*			●

Control Version

Manual model
Enhanced model
Communications model

Control Output			
Programmable digital contacts	0	2	2
Pump running		●	●
Pump standby/stopped [not pumping but ready]		●	●
Alarm status		●	●
User alarm status		●	●
Internal/External mode indication		●	●
Pump stopped		●	●
Stroke pulse		●	●
Timed event running		●	●
Programmable analog output	0	1	1
Flow rate [4-20 mA correlates to 0 - max capacity]		●	●
Mirror analog input 1		●	●
Mirror analog input 2		●	●
Power supply for remote device [24V] (eg. Flow sensor)	0	1	1
Operation functions			
Capacity control by motor speed variation	●	●	●
Variable stroke profile (variable discharge speed/constant suction speed)	●	●	●
Slow suction mode for viscous or degassing media	●	●	●
Calibration function (single point)	●	●	●
Prime feature (max capacity) button, timer	●	●	●
Totalizer (strokes, volume, hours motor operation, number of power cycles)	●	●	●
Keypad lock (software driven with password)	●	●	●
Clock feature (date and 12 hour time)	●	●	●
Diaphragm replacement mode (sets stroke to extended position)	●	●	●
Display firmware revision	●	●	●
Load factory defaults	●	●	●
Battery to maintain date and time settings when main power is removed	●	●	●
EEPROM nonvolatile memory (configurations saved/powers up in last used mode)	●	●	●
Internal/External input control mode configuration	●	●	●
Alarm output mask configuration (configure which events trigger alarm output relay)	●	●	●
Analog input response curve customization		●	●
Input pulse width setting		●	●
Start/Stop via remote signal	●	●	●
Pump switch off on tank empty	●	●	●
Modbus RTU / Profibus DP protocol			●
StayPrime Degassing Technology	●	●	●
Alarm Log	●	●	●

* Must order pump configured for your control protocol

Making PROTEUS pumps work for you

For integrators

Specifying PROTEUS metering pumps for critical systems gives process systems integrators the best guarantee of reliability, accuracy, and performance in challenging environments.



For operators

Consider the value of installing an PROTEUS metering pump when making updates to your equipment. The PROTEUS pump series offers field-proven dosing technology, a state-of-the-art technology platform, and an easy-to-use navigation system all backed by authorized industry experts to support you long after the installation.

Options and accessories

A wide range of options and accessories are available to customize the PROTEUS metering pump to your application.

Mechanically actuated diaphragm liquid end materials:

- Polypropylene
- PVDF
- 316L stainless steel

PROTEUS accessories include:

- Backpressure valves
- Safety valves
- Pulsation dampeners
- Calibration columns



Ingersoll Rand Inc. (NYSE:IR), driven by an entrepreneurial spirit and ownership mindset, is dedicated to helping make life better for our employees, customers and communities. Customers lean on us for our technology-driven excellence in mission-critical flow creation and industrial solutions across 40+ respected brands where our products and services excel in the most complex and harsh conditions. Our employees develop customers for life through their daily commitment to expertise, productivity and efficiency. For more information, visit www.IRCO.com



Contact your local representative to find out more about PROTEUS®
the intelligent pump that's making a name for itself.

www.miltonroy.com
www.proteuspumps.com



*PROTEUS is a trademark of Milton Roy, LLC
© 2016 Milton Roy, LLC. All Rights Reserved.*



An Ingersoll Rand Business

#IR-54814.05 Rev 7/2022