



An Ingersoll Rand Business

MP Pumps Flomax[®] Self Priming Pump

AGRICULTURE APPLICATIONS

- Planter Bars
- Bulk Storage
- Fertilizer
- Trailers
- Fuel Trailers
- Nurse Trailers
- Sprayers
- Totes
- Mixers
- Fish Farms





An Ingersoll Rand Business

REMOVEABLE FLANGES

Piping remains in place when servicing

OPEN SEAL CAVITY

Keeps solids from damaging the seal parts

STAINLESS STEEL DRIVE SLEEVE

- Protects the driver from wear and corrosion to seal the fluid from external contact
- Sizes to fit standard shaft drives

PUMP END (PUMPAK) DESIGN

- Allows maximum interchangeability with engines, motors, hydraulic and clutch drives
- Back pull-out design

SUCTION CHECK VALVE

- Maintains prime fluid in the inlet pipe and prevents reverse siphoning
- Stainless Steel weights

REPLACEABLE WEAR PLATE


Protects the pump housing from wear and allows for total refurbishing

BALANCED IMPELLER

- Extends bearing life
- Available in various trim diameters for reduced flow/HP applications

PERFORMANCE, SIZE AND WEIGHT

- Flomax priming performance sets the industry standards
- Pump is light weight and fits in compact spaces

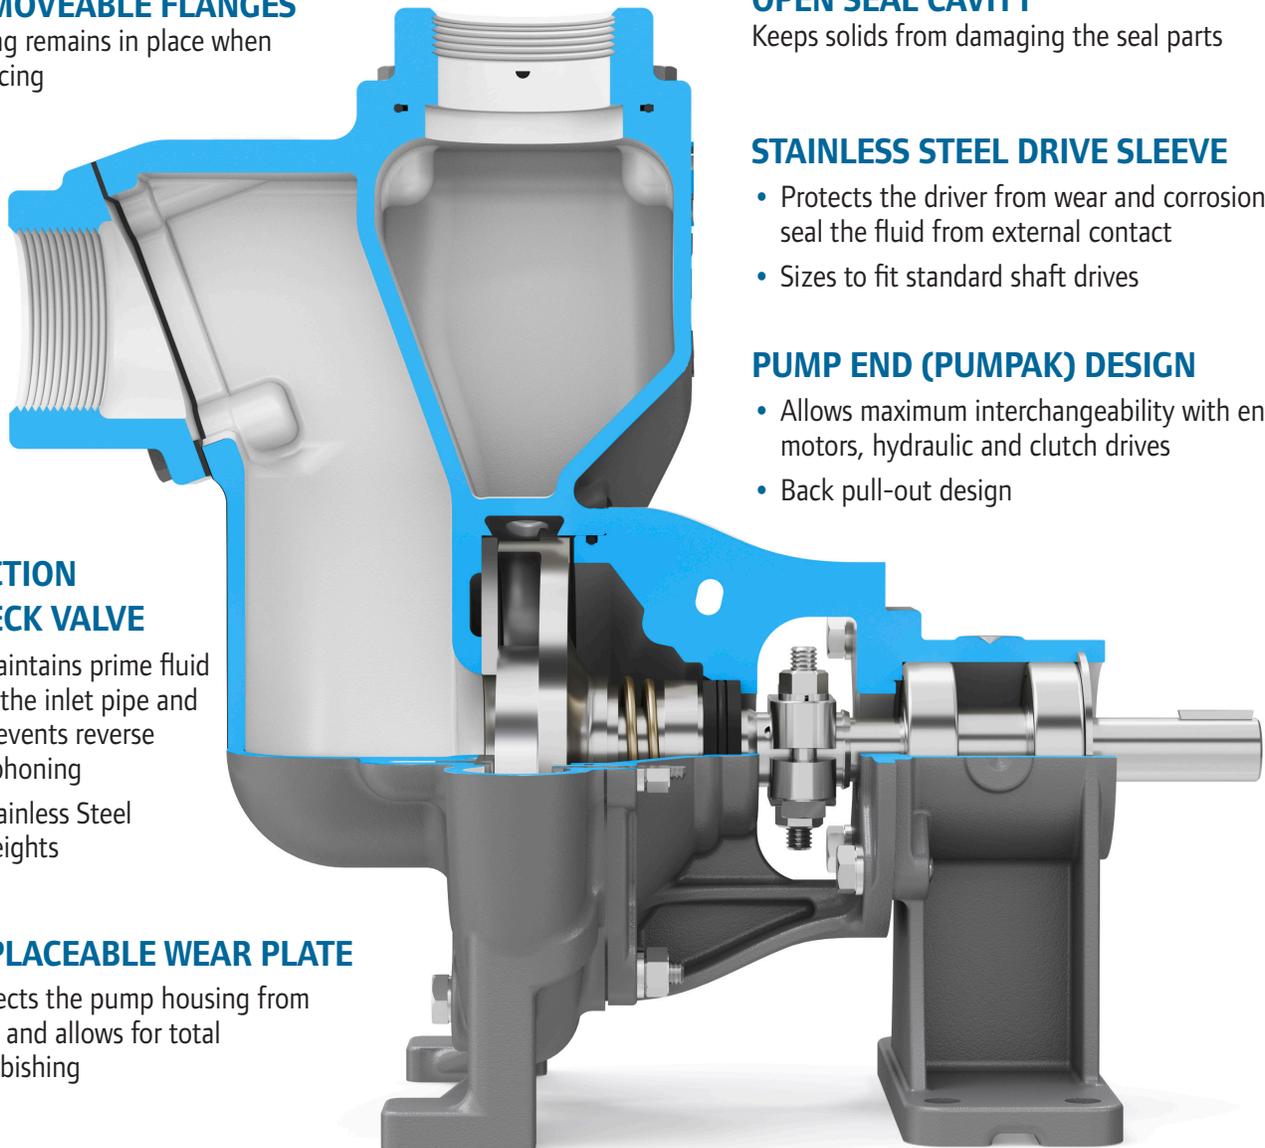

12500 South Pulaski Road - Alsip, IL 60803

Phone: (800) 563.8006

www.mppumps.com