new D6AL



PRODUCT ECO DESIGNED

Generation

en

D6AL

NEXT GENERATION





EXTREME DURABILITY & COST-EFFECTIVE MAINTENANCE

- FLOW CAPACITY UP TO 6,000 L/H
- OPERATES FROM 100 L/H
- IMPROVED CHEMICAL COMPATIBILITY
- IN-LINE DOSING CONSISTENCY

MOTOR INNOVATION

- CYLINDER LINER + REPLACEABLE LIP SEALS
- SIMPLIFIED HYDRAULIC MOTOR
- EXTENDED MOTOR SERVICE LIFE
- ECO-DESIGN



ACV

The Life Cycle Assessment information sheet is available via the QR-code

With our eco-design approach, we aim to reduce the ecological impact of our products, while prioritising their durability and repairability.



A new design engineered to enhance performance in large-scale livestock operations.







PRODUCT ECO DESIGNED


Animal Health Line

	D6AL2
Min/max operating flow range	100 l/h - 6000 l/h [0.44 - 26.4 US gpm]
Maximum operating temperature	40°C • [104°F]
Min/max operating water pressure	0,3 - 8 bar [4.3 - 116 psi]
Min/max dosing percentage	0,2% - 2% 1:500 - 1:50
Suction hose	Ø 12 X 16 mm • L 1,75 m
Connection	BSPT 1¼" male • Ø33x42mm
Hydraulic motor capacity (two piston clicks)	~ 1 liter • ~ 0.26 US Gallon
Other special features	Inlet injection, internal motor sleeve
Seals	VF



Generation

DOSATRON Technology

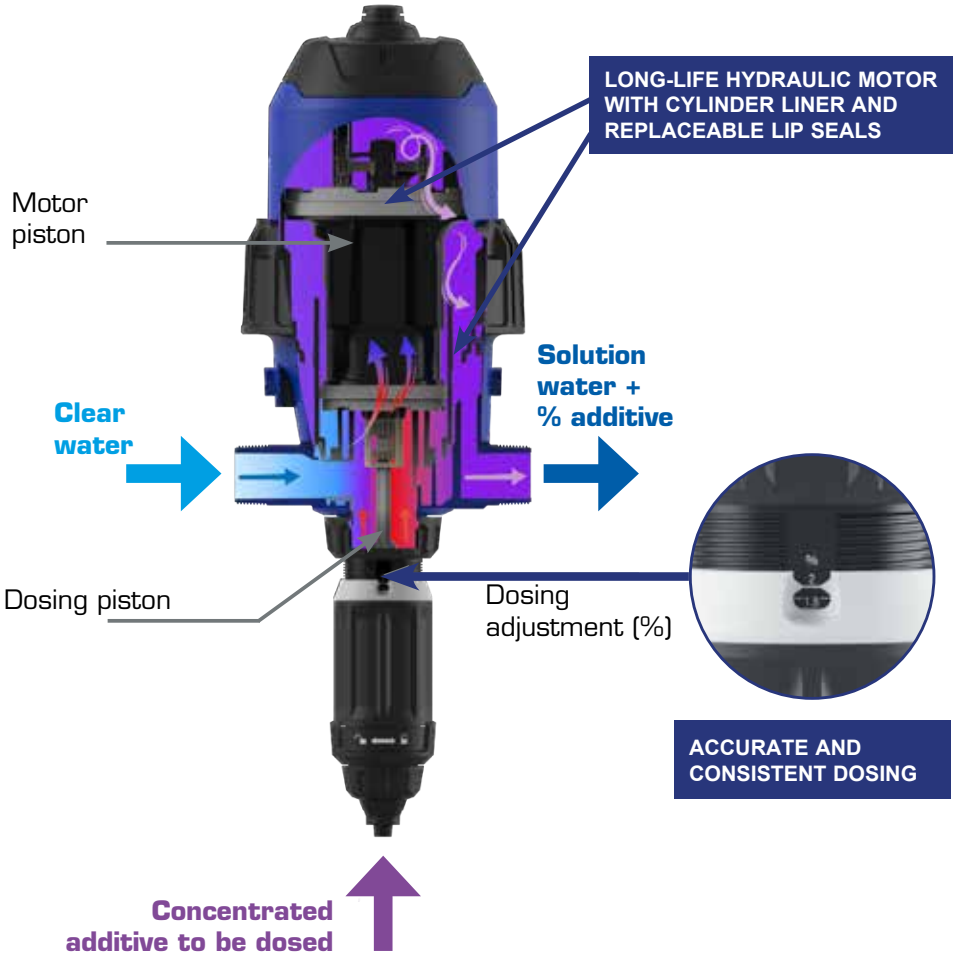

Customer service

DOSATRON APP

DOSATRON INTERNATIONAL S.A.S
Rue Pascal - BP 6 - 33370 TRESSES (Bordeaux) - FRANCE
Tel. 33 (0)5 57 97 11 11 - Fax. 33 (0)5 57 97 11 29 / 33 (0)5 57 97 10 85
info@dosatron.com - www.dosatron.com

This document does not constitute a contractual obligation and is for information purposes only. DOSATRON INTERNATIONAL reserves the right to modify its devices at any time. Photo credit: ©Adobe Stock - Rathmakers. Some images have been generated by AI.

©DOSATRON INTERNATIONAL S.A.S 2026 - DOCD6AL-EN_10/2026