

SCHEMATICS

Dosatron Liquid Dispenser

Model # D6MZ3000 - 26 GPM

1:3000 - 1:300

4.3 - 116 PSI

Suggested Installation:

200 mesh/80 micron water filter prior to unit

One-way water hammer arrestor downstream from unit
for water hammer protection

Suggested Maintenance:

Replace injection seals every 12 months

DOSATRON SALES & SERVICE - NORTH & CENTRAL AMERICA

Dosatron International, LLC

Phone: 727-443-5404 Service: (800) 523-8499

Fax: 727-447-0591

www.dosatron.com


D6 1:3000 - 1:300

26 GPM - 1:3000 - 1:300

6m³/h - 0.03 - 0.3%

4.3 - 116 PSI

0.3 - 8 bar

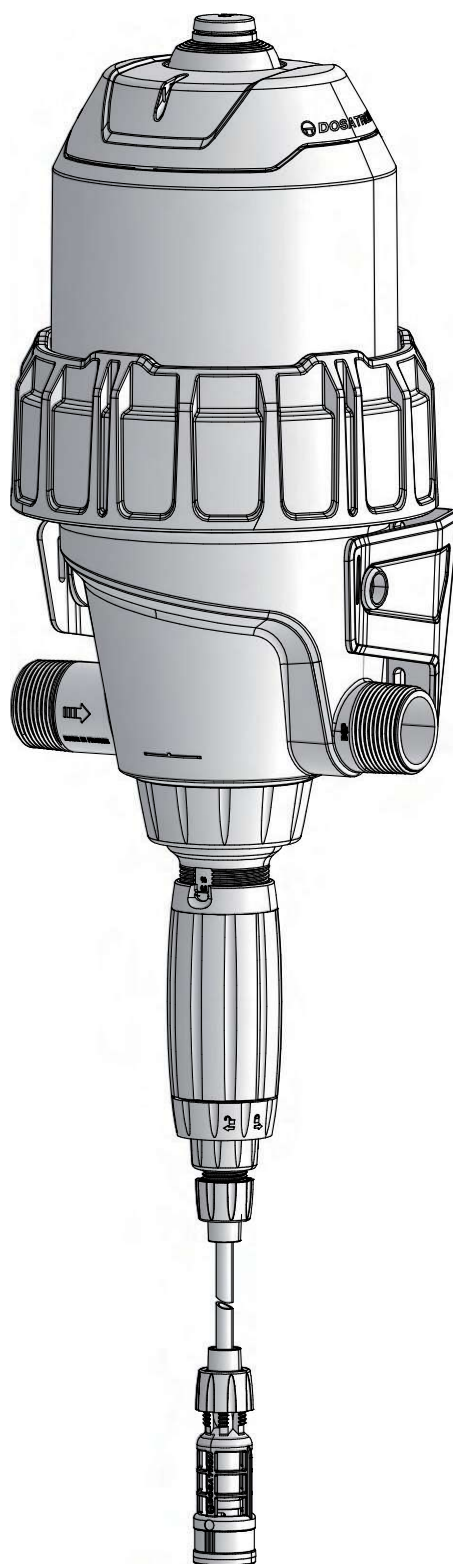


D6 1:3000 - 1:300

26 GPM - 1:3000 - 1:300

6m³/h - 0.03 - 0.3%

4.3 - 116 PSI

0.3 - 8 bar

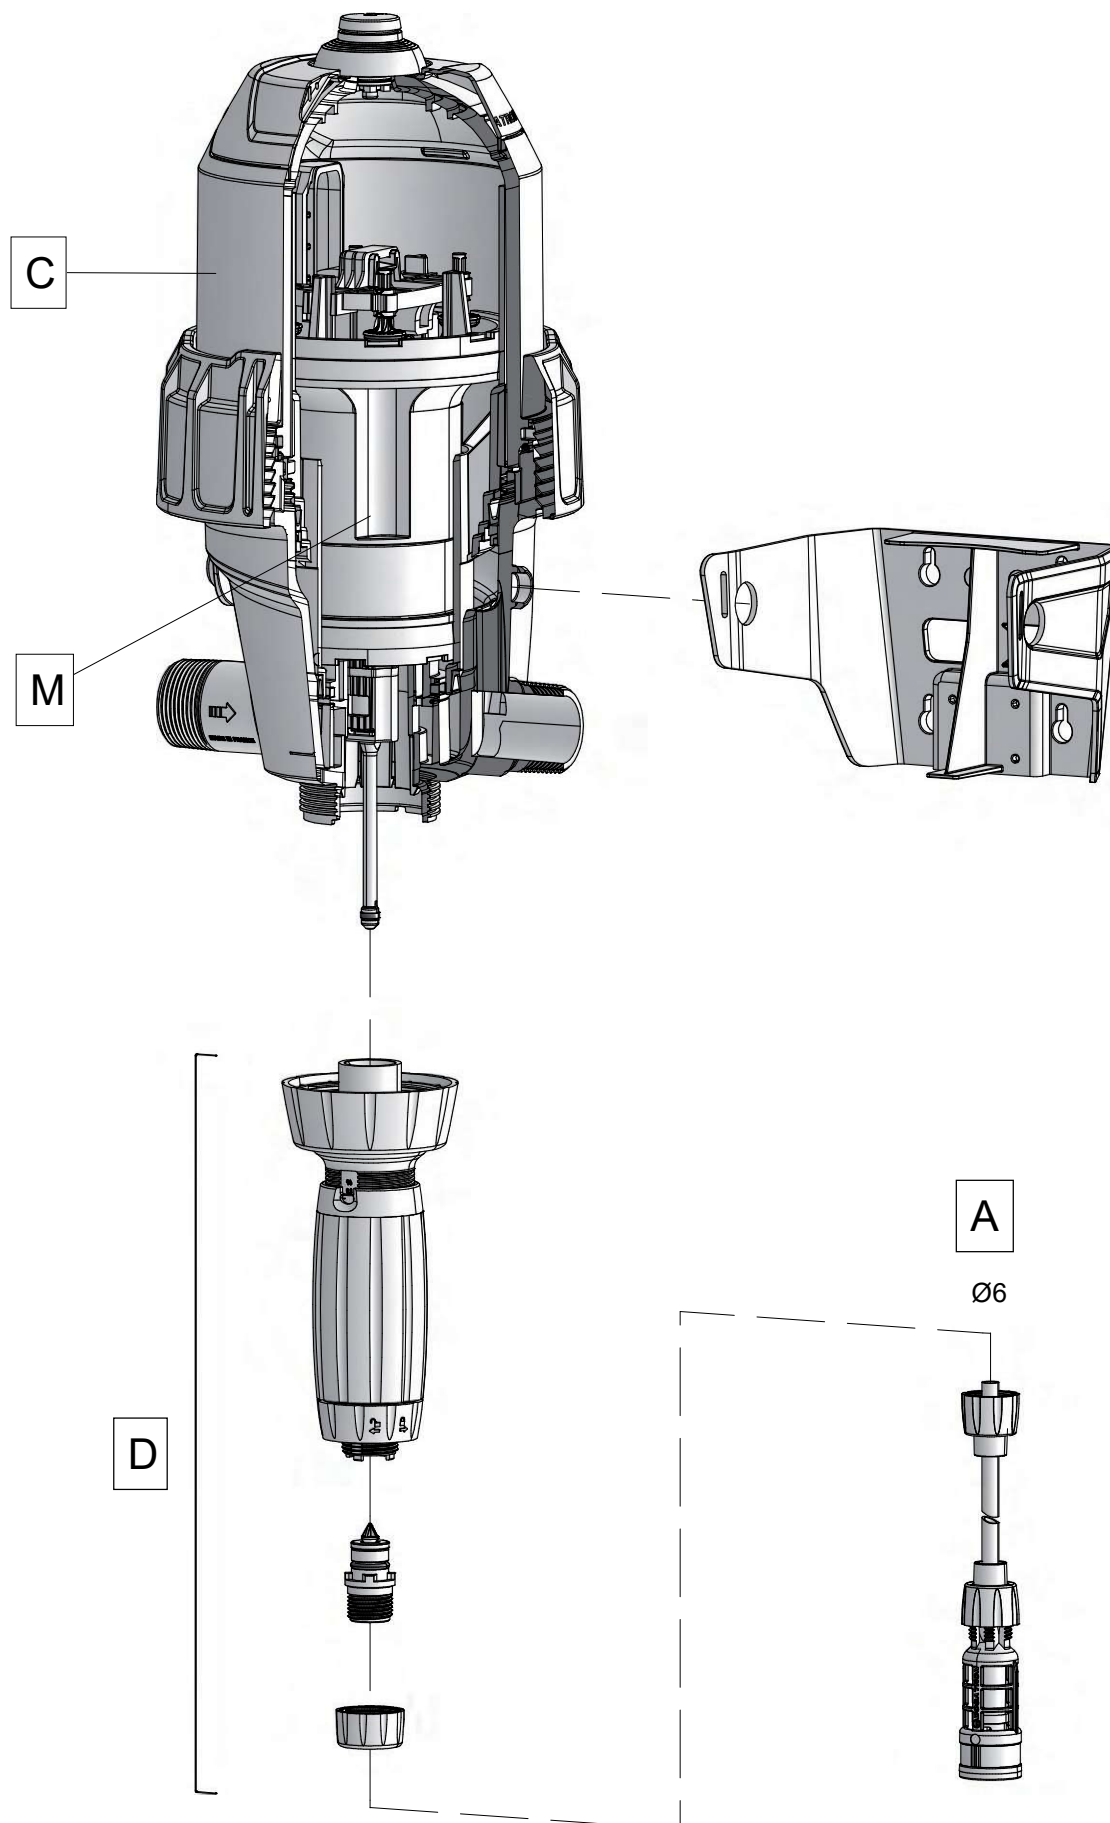


D6 1:3000 - 1:300

26 GPM - 1:3000 - 1:300

6m³/h - 0.03 - 0.3%


4.3 - 116 PSI

0.3 - 8 bar

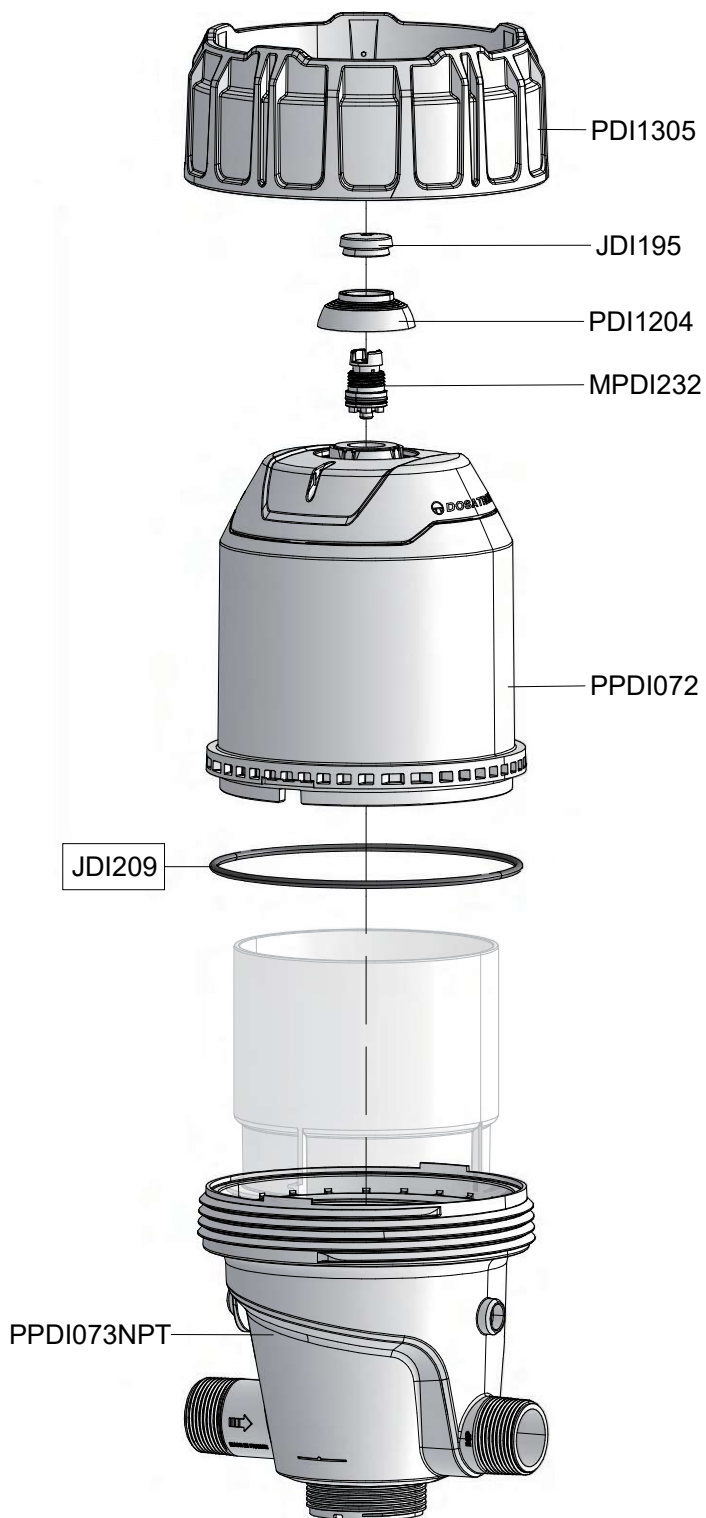


OPTION

MPDI196



PDI1313

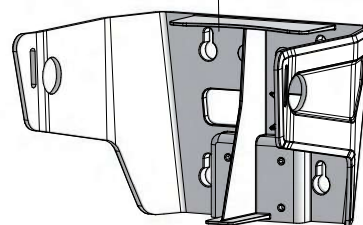



D6 1:3000 - 1:300

26 GPM - 1:3000 - 1:300

6m³/h - 0.03 - 0.3%

4.3 - 116 PSI

0.3 - 8 bar

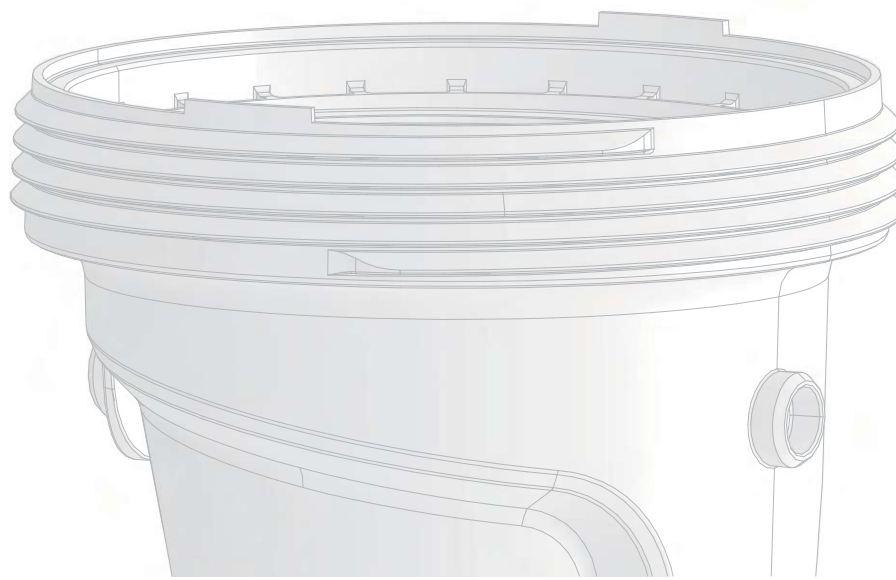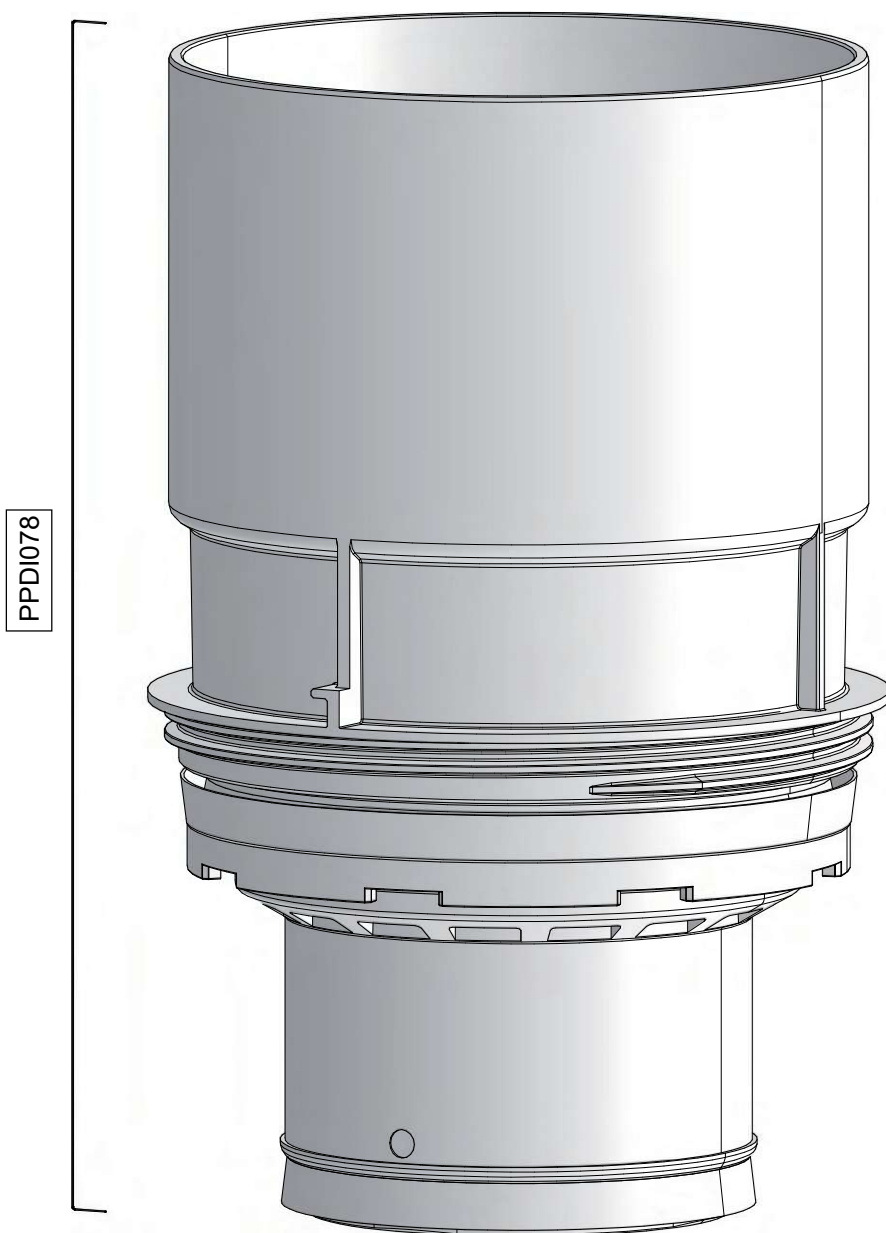


D6 1:3000 - 1:300

26 GPM - 1:3000 - 1:300

6m³/h - 0.03 - 0.3%

4.3 - 116 PSI

0.3 - 8 bar

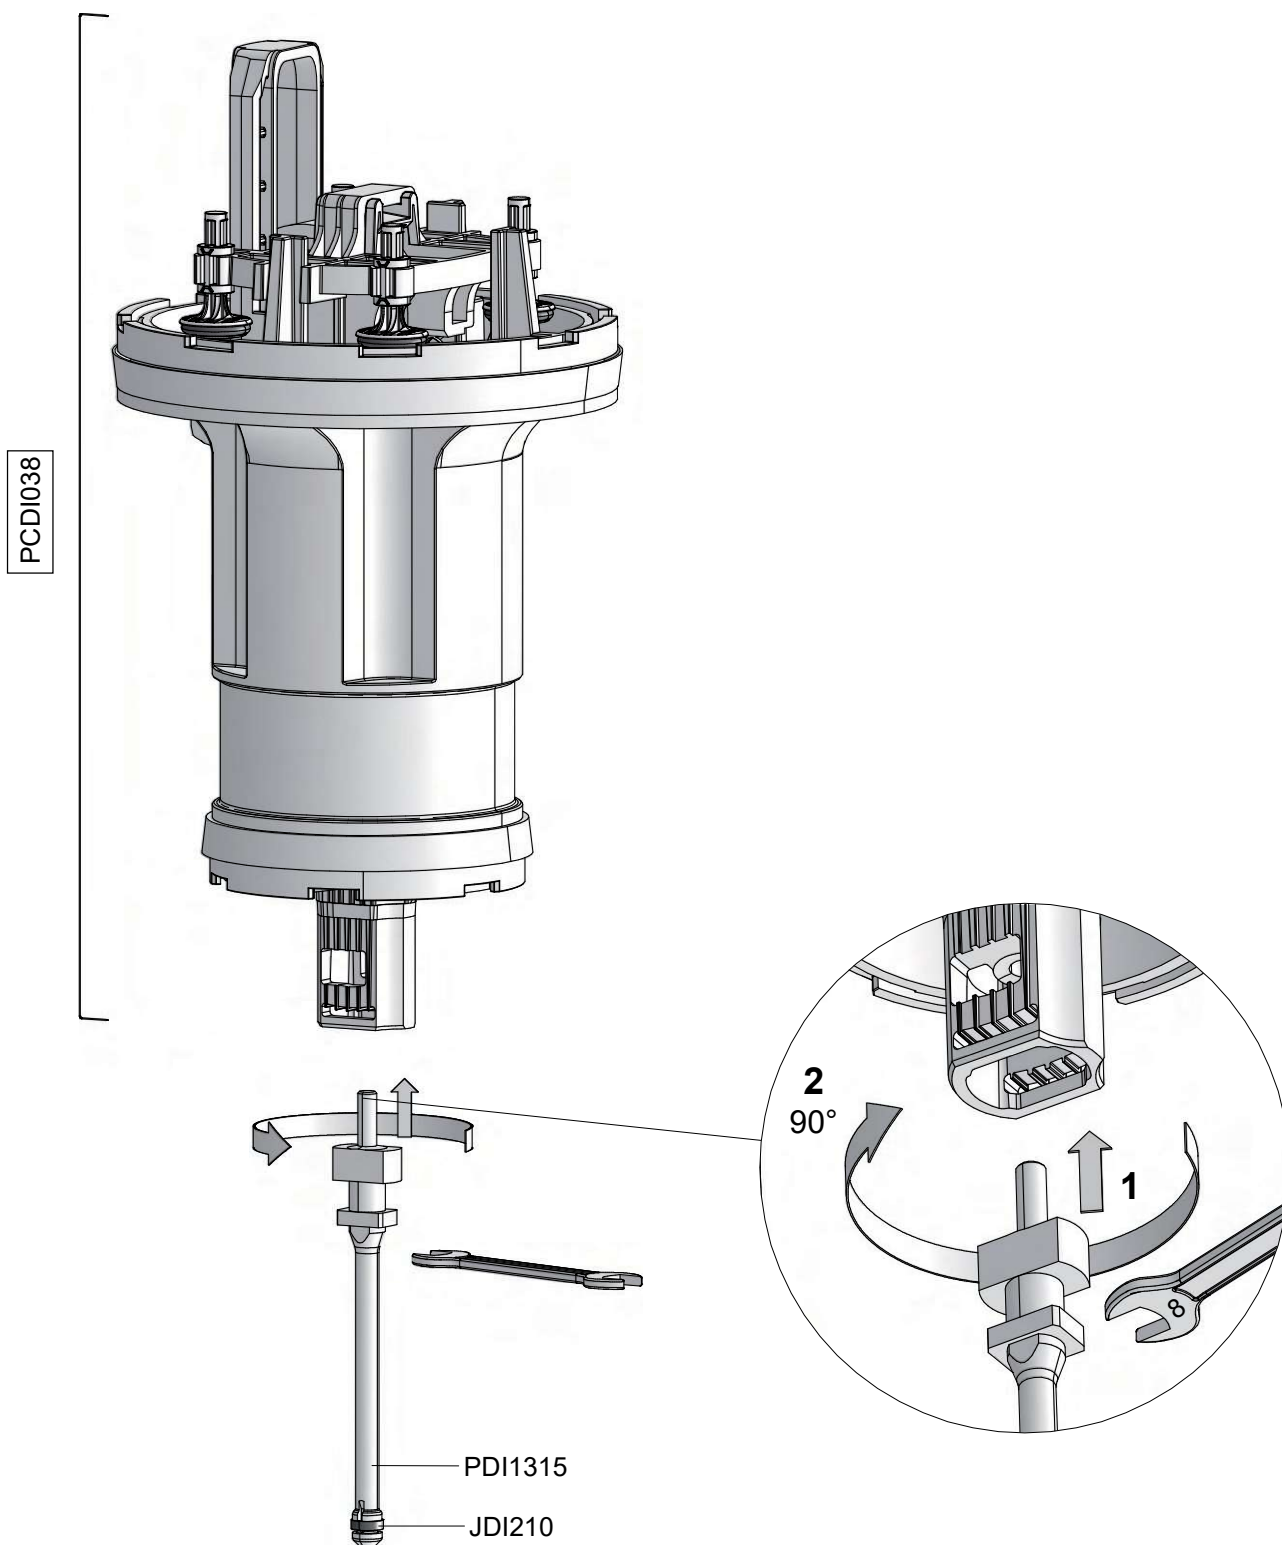

D6 1:3000 - 1:300


26 GPM - 1:3000 - 1:300

6m³/h - 0.03 -0.3%

4.3 - 116 PSI

0.3 - 8 bar

PCDI038

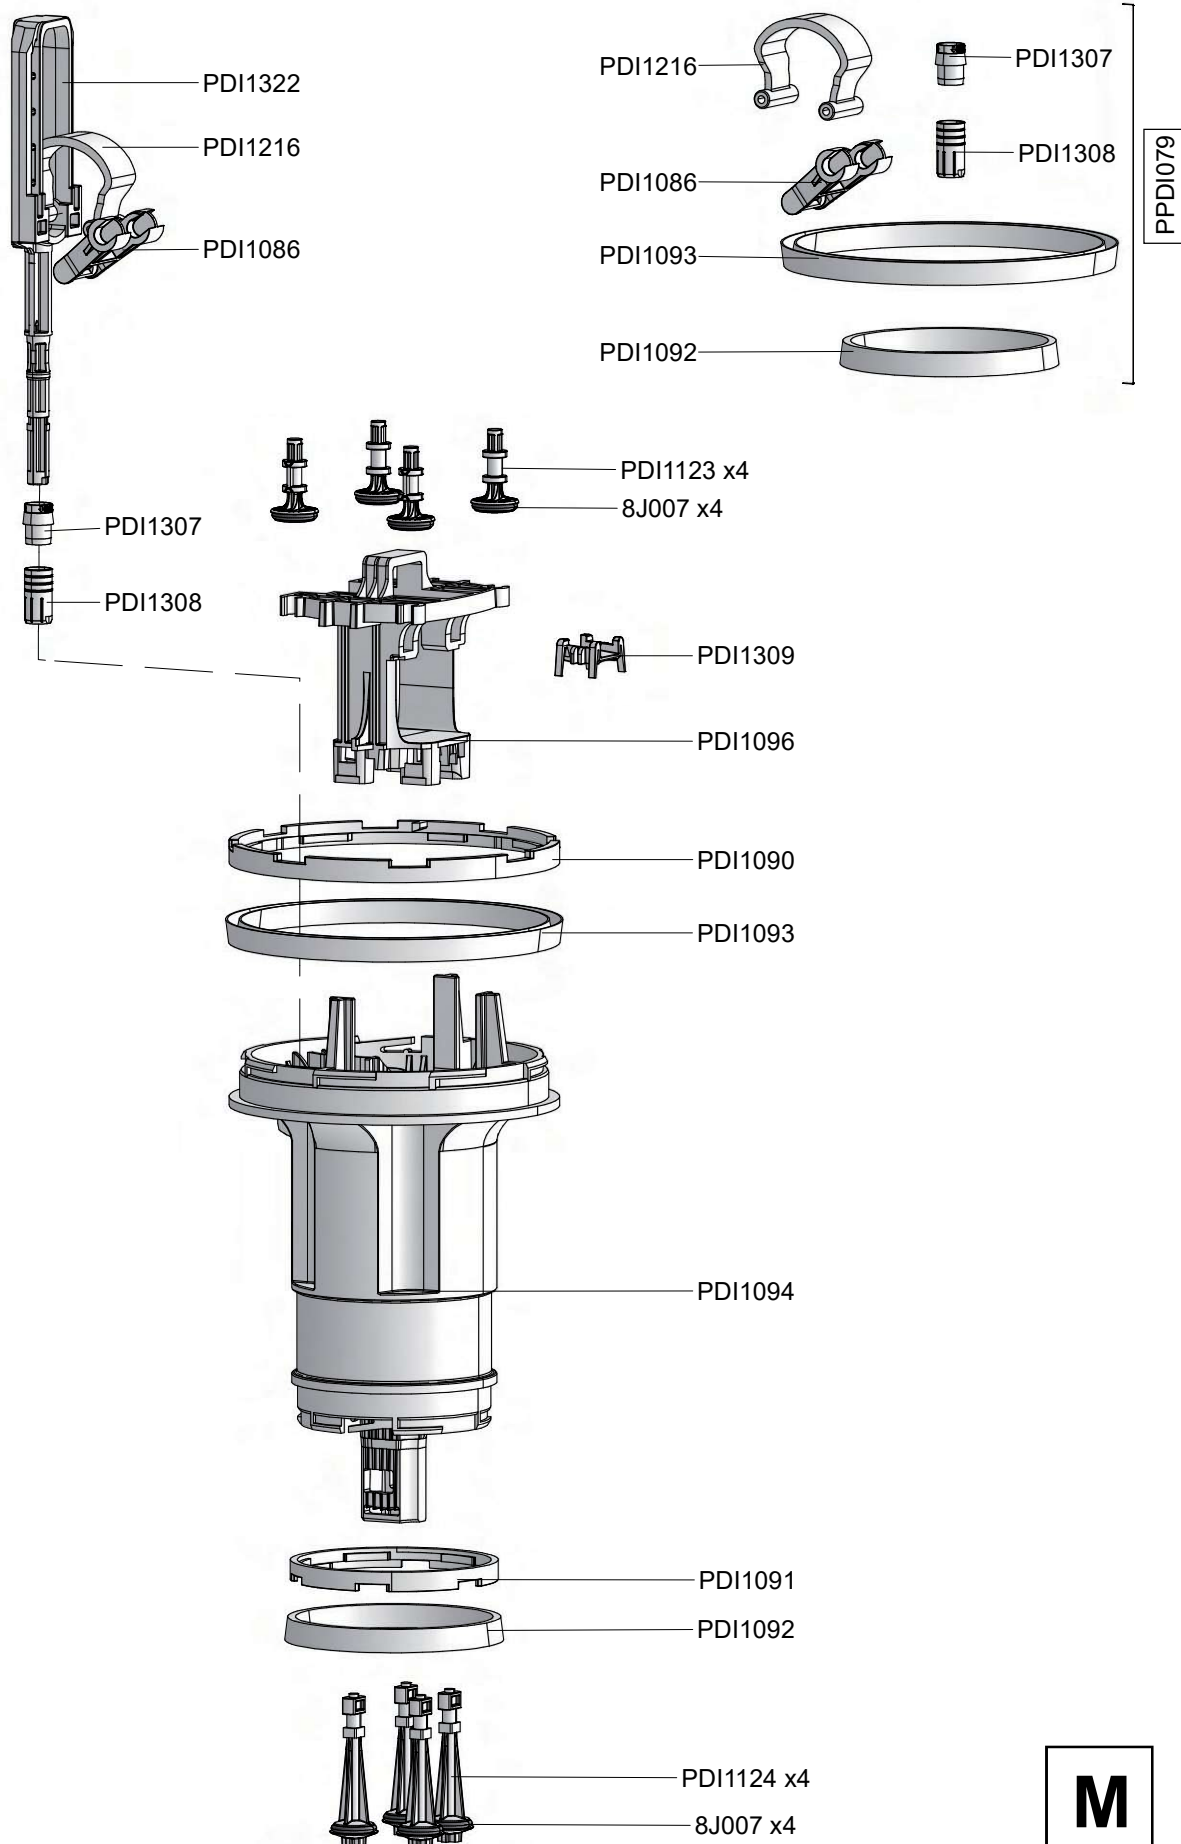


D6 1:3000 - 1:300

26 GPM - 1:3000 - 1:300

6m³/h - 0.03 -0.3%

4.3 - 116 PSI

0.3 - 8 bar

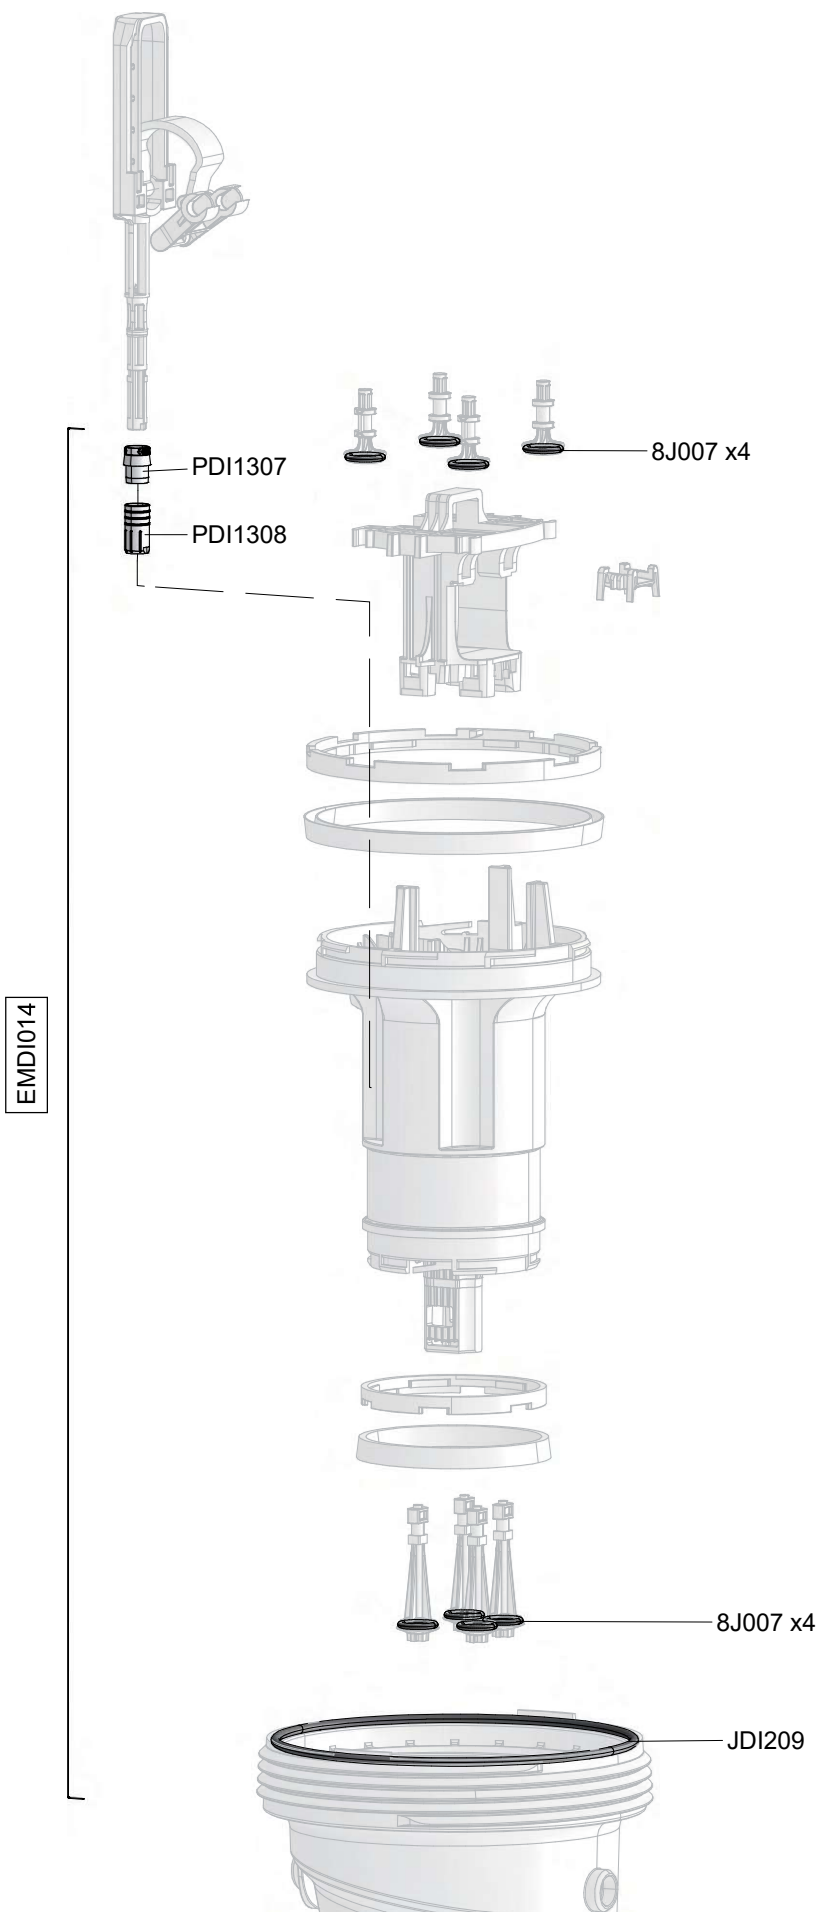


D6 1:3000 - 1:300

26 GPM - 1:3000 - 1:300

6m³/h - 0.03 - 0.3%

4.3 - 116 PSI

0.3 - 8 bar

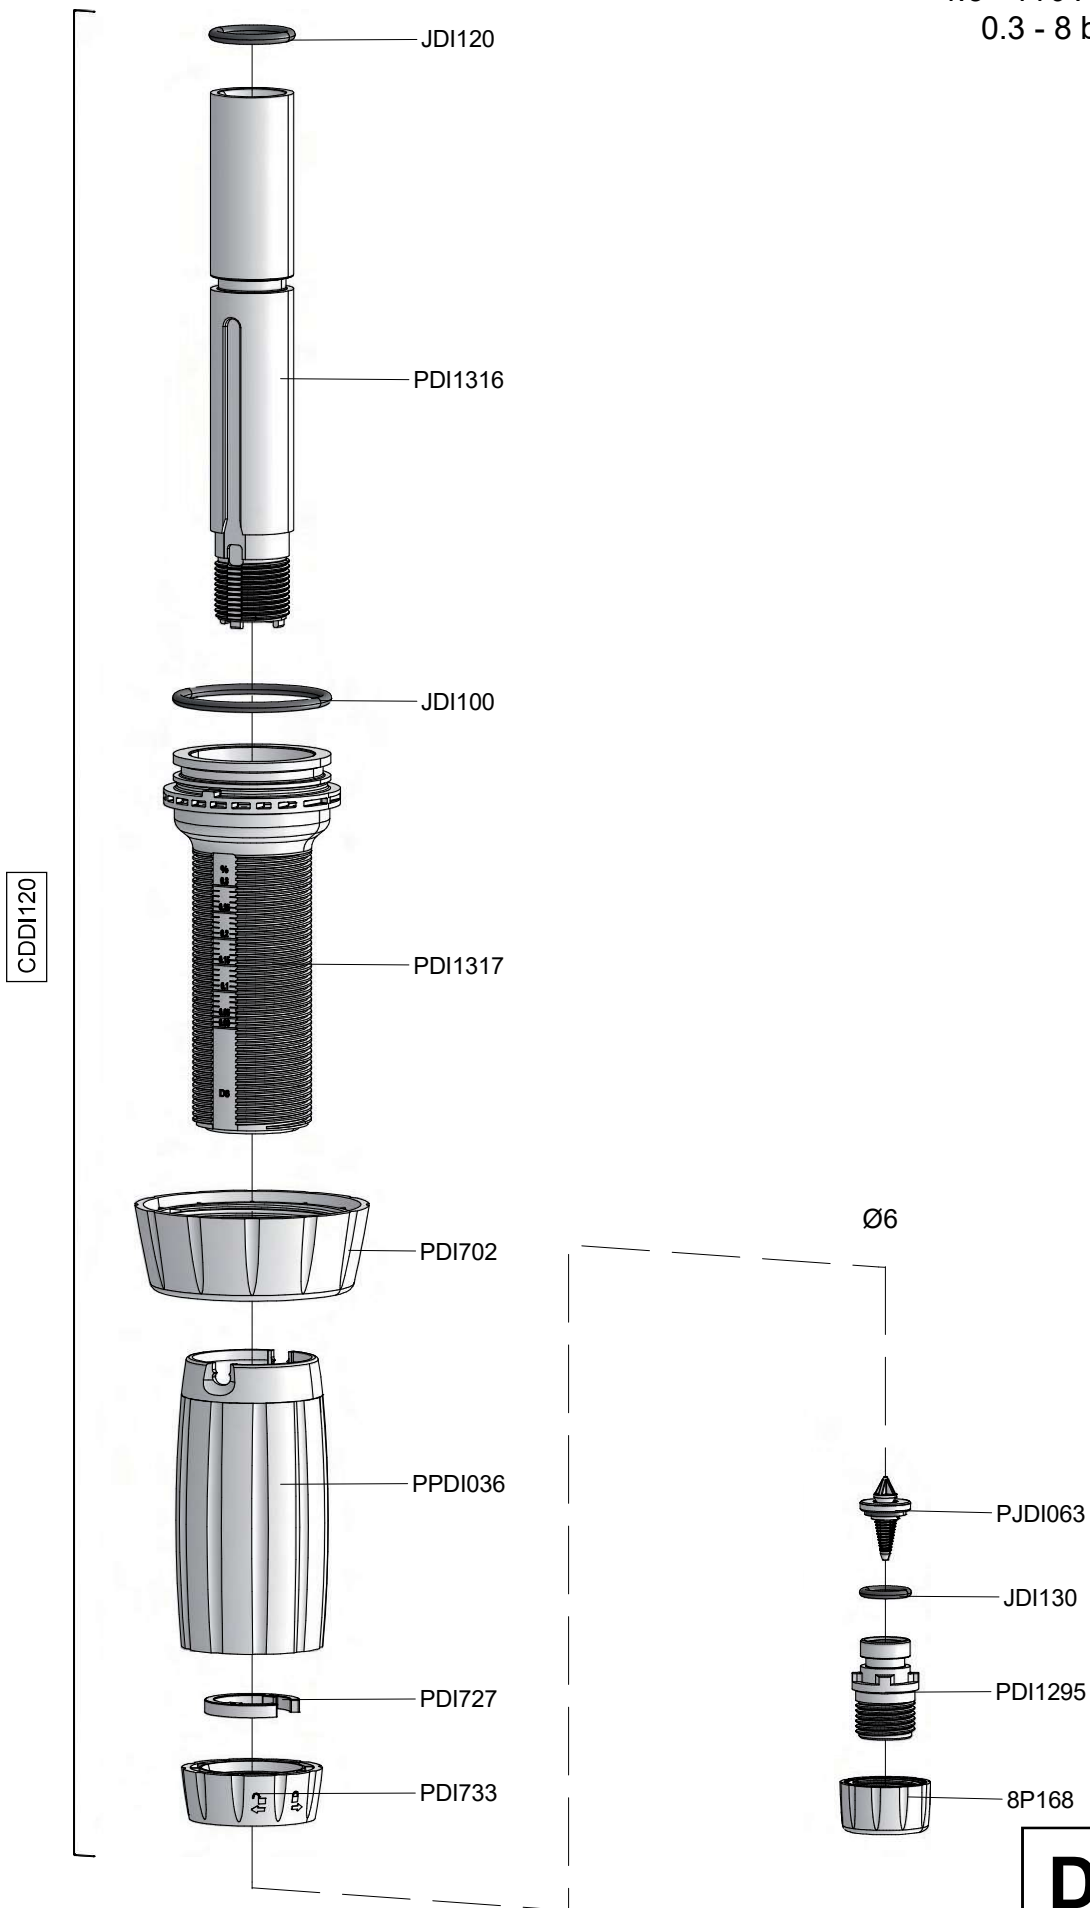


D6 1:3000 - 1:300

26 GPM - 1:3000 - 1:300

6m³/h - 0.03 - 0.3%

4.3 - 116 PSI

0.3 - 8 bar

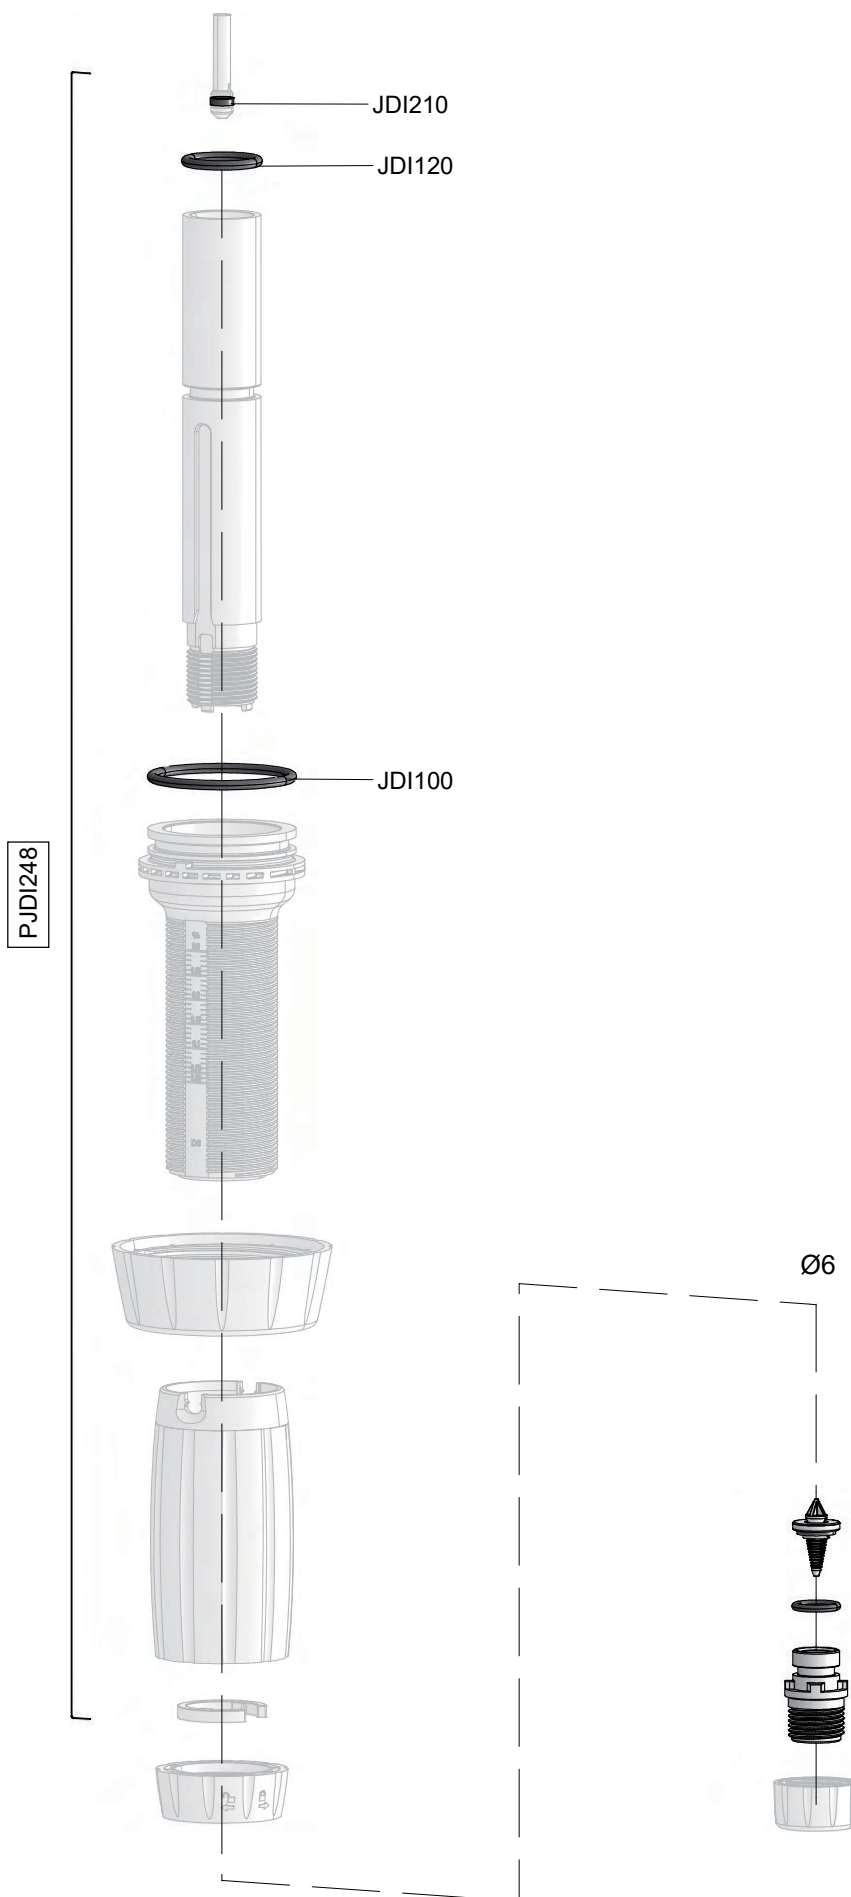

D6 1:3000 - 1:300

26 GPM - 1:3000 - 1:300

6m³/h - 0.03 - 0.3%

4.3 - 116 PSI

0.3 - 8 bar

