

FEATURES

- > Oil-less operation
- > RoHS and REACH compliant
- > Quiet, low pulsating head design
- > Reinforced plastic head and connecting rods
- > Balanced for smooth, low vibration
- > Long-life diaphragms
- > Dedicated vacuum or pressure/vacuum performance
- > Lightweight design
- > 12V or 24V DC motor
- > Easily integrated into system

Declaration documentation available upon request

TYPICAL APPLICATIONS

- > Medical Aspirators
- > Laboratory Analyzers
- > Emergency Vehicle Equipment
- > Vacuum Handling
- > Leak Detection
- > Air & Gas Samplers
- > Hydraulic Evacuation

BASE MODELS

007BDC19
(12V DC or 24V DC)

007CDC19
(12V DC or 24V DC)



Diaphragm

007 Series

Flow	1.4 cfm (39.5 l/min)
Max. pressure	15 psi (1.0 bar)
Max. vacuum	85% local barometer


Available in 12V DC or 24V DC



007BDC19



007CDC19

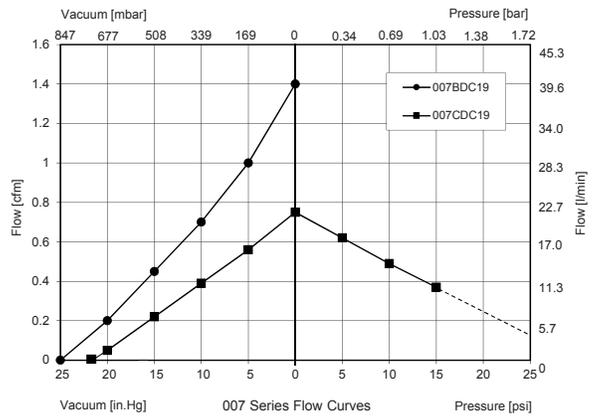

NOTE: All test values are nominal and for reference only. They are not guaranteed maximum or minimum limits, nor do they imply mean or median.

PERFORMANCE DATA	T13-0117	T03-0628	T04-0276	T04-0279
Model Number	007BDC19	007BDC19/24	007CDC19	007CDC19/24
Head Configuration	Vacuum	Vacuum	Pressure/vacuum	Pressure/vacuum
Stroke	0.19 in. (4.8 mm)	0.19 in. (4.8 mm)	0.19 in. (4.8 mm)	0.19 in. (4.8 mm)
Nominal voltage input	12V DC	24V DC	12V DC	24V DC
Max. open air flow	1.4 cfm (39.5 l/min)	1.4 cfm (39.5 l/min)	.80 cfm (23.0 l/min)	.80 cfm (23.0 l/min)
Max. rated pressure	N/A	N/A	15 psi (1.0 bar)	15 psi (1.0 bar)
Current at rated pressure	N/A	N/A	3.8A	1.92A
Power at rated pressure	N/A	N/A	46W	46W
Max. rated vacuum	85% local barometer	85% local barometer	78% local barometer	78% local barometer
Current at rated vacuum	2.0A	1.0A	1.9A	0.9A
Power at rated vacuum	24W	24W	23W	21W
Max. restart	85% local barometer	85% local barometer	15psi / 78% local barometer	15psi / 78% local barometer

ELECTRICAL DATA				
Motor type	Permanent magnet DC motor			
Motor locked rotor current	32A	17A	32A	17A
Motor insulation class	F	F	F	F
Thermal switch	No	No	No	No
Lead wire color, gauge	Red, black, 18 AWG			

GENERAL DATA				
Operating ambient tempera-	-40°F to 158°F (-40°C to 70°C)			
Safety Certification	TUVE11	Consult Factory	TUVE11	Consult Factory
Net weight	2.9 lbs (1.3 kg)			

PRODUCT DIMENSIONS

Dimensions in inches (mm)

007BDC19
007BDC19/24

3X #8(.164)-32 UNC-2B

EXHAUST
INTAKE

NOTE: ALL TAPPED PORTS ARE 1/8-27 NPT

007CDC19
007CDC19/24

3X #8(.164)-32 UNC-2B

EXHAUST
INTAKE

PUMP AND COMPRESSOR SOLUTIONS FOR OEMS WORLDWIDE

gd-thomas.com

THOMAS
by Gardner Denver



Gardner Denver Thomas GmbH

Livry-Gargan-Str. 10
82256 Fürstentfeldbruck
Germany

T +49 8141 2280 0
F +49 8141 8892136

thomas.de@gardnerdenver.com

Gardner Denver Thomas, Inc.

1419 Illinois Avenue
Sheboygan, WI 53081
USA

T +1 920 4574891
F +1 920 4514276

td.usa@gardnerdenver.com

Gardner Denver Thomas Pneumatic Systems (Wuxi) Co., Ltd.

No. 1 New Dong An Road, Shuofang Town, Wuxi, Xinwu District
Jiangsu 214142
China

T +86 510 6878 2258
F +86 510 6878 2200

thomas.cn@gardnerdenver.com

The information presented in this material is based on technical data and test results of nominal units. It is believed to be accurate and reliable and is offered as an aid to help in the selection of Thomas products. It is the responsibility of the user to determine the suitability of the product for the intended use and the user assumes all risk and liability in connection there with. Thomas does not warrant, guarantee or assume any obligation or liability in connection with this information.

Models presented in this catalog are representative of the product family. Photos of products pictured in this catalog do not necessarily represent a specific model number. To obtain further information for custom options, contact your local Thomas office.

Printed in U.S.A Form No. 850-3324 01/2019 © Gardner Denver Thomas, Inc. All rights reserved.