



Ingersoll Rand®

Get Precise Performance Without Compromise.

The **E-Lift Series Electric Balancer** from **Ingersoll Rand**® provides extended lift capacity of up to 600kg with intuitive operator controls that deliver millimeter accuracy for precise positioning.

An in-handle OLED display enables custom programming controls that set upper and lower limits and passcode protection to ensure only trained operators can use the equipment. Enhanced safety features such as overload protection and anti-recoil technology prevent lifting beyond load capacity and equipment deviation due to sudden changes. UL/CSA and CE compliant for reliable performance in demanding applications.

E-Lift Series

Electric Balancers



Ingersoll Rand®
E-Lift Series
 Electric
 Balancer

Power Cable

Power Unit

Spiral Cable


360 Swivel Assembly

E-Stop

OLED Display

Control Handle

Hook

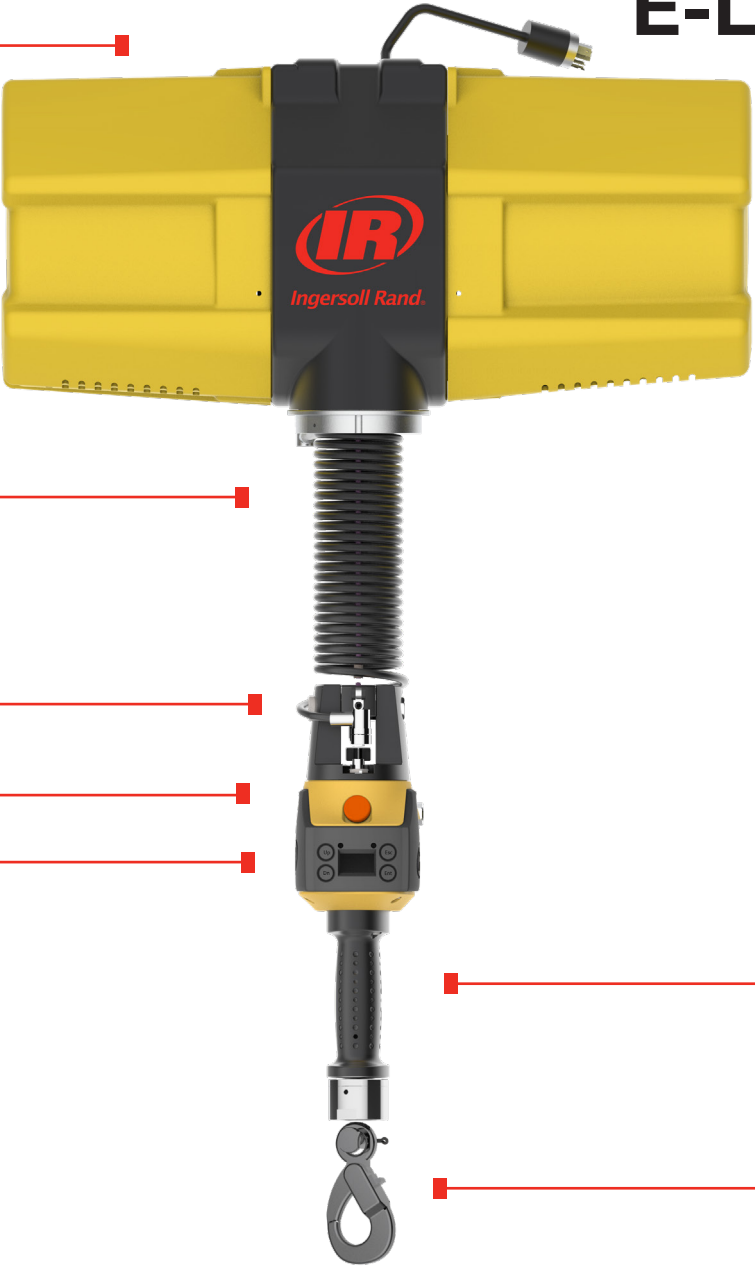

Configuration	Model Number	Max Capacity* (Load & Tool)	Duty Cycle	Max Handle Mode Speed (ft/mm)	Max Float Mode Speed (ft/mm)	Max Travel Range (W)	Rated Power (W)	Lifting Media (Stainless Steel Wire)
EIS Inline Slide Control Handle	EIS017138W16UL	160 lbs	H4/Equivalent	98	118	11	750	5mm
	EIS044138W16UL	400 lbs	H4/Equivalent	75	89	11	1500	5mm
	EIS066138W16UL	600 lbs	H4/Equivalent	42	44	11	2000	5mm
	EIS132068W18UL	1200 lbs	H3/Equivalent	22	22	5.5	2000	6.5mm

* 160 lbs & 400lbs models run on single phase 240V; 600 lbs & 1200lbs models run on three phase 240V



Ingersoll Rand (NYSE:IR), driven by an entrepreneurial spirit and ownership mindset, is dedicated to helping make life better for our employees, customers, and communities. Customers lean on us for our technology-driven excellence in mission-critical flow creation and industrial solutions across 40+ respected brands where our products and services excel in the most complex and harsh conditions. Our employees develop customers for life through their daily commitment to expertise, productivity, and efficiency.

Learn more at www.irtools.com

