


67536-X Stainless Steel Follower Assembly "A" Footprint (Bolted Pump Connection)

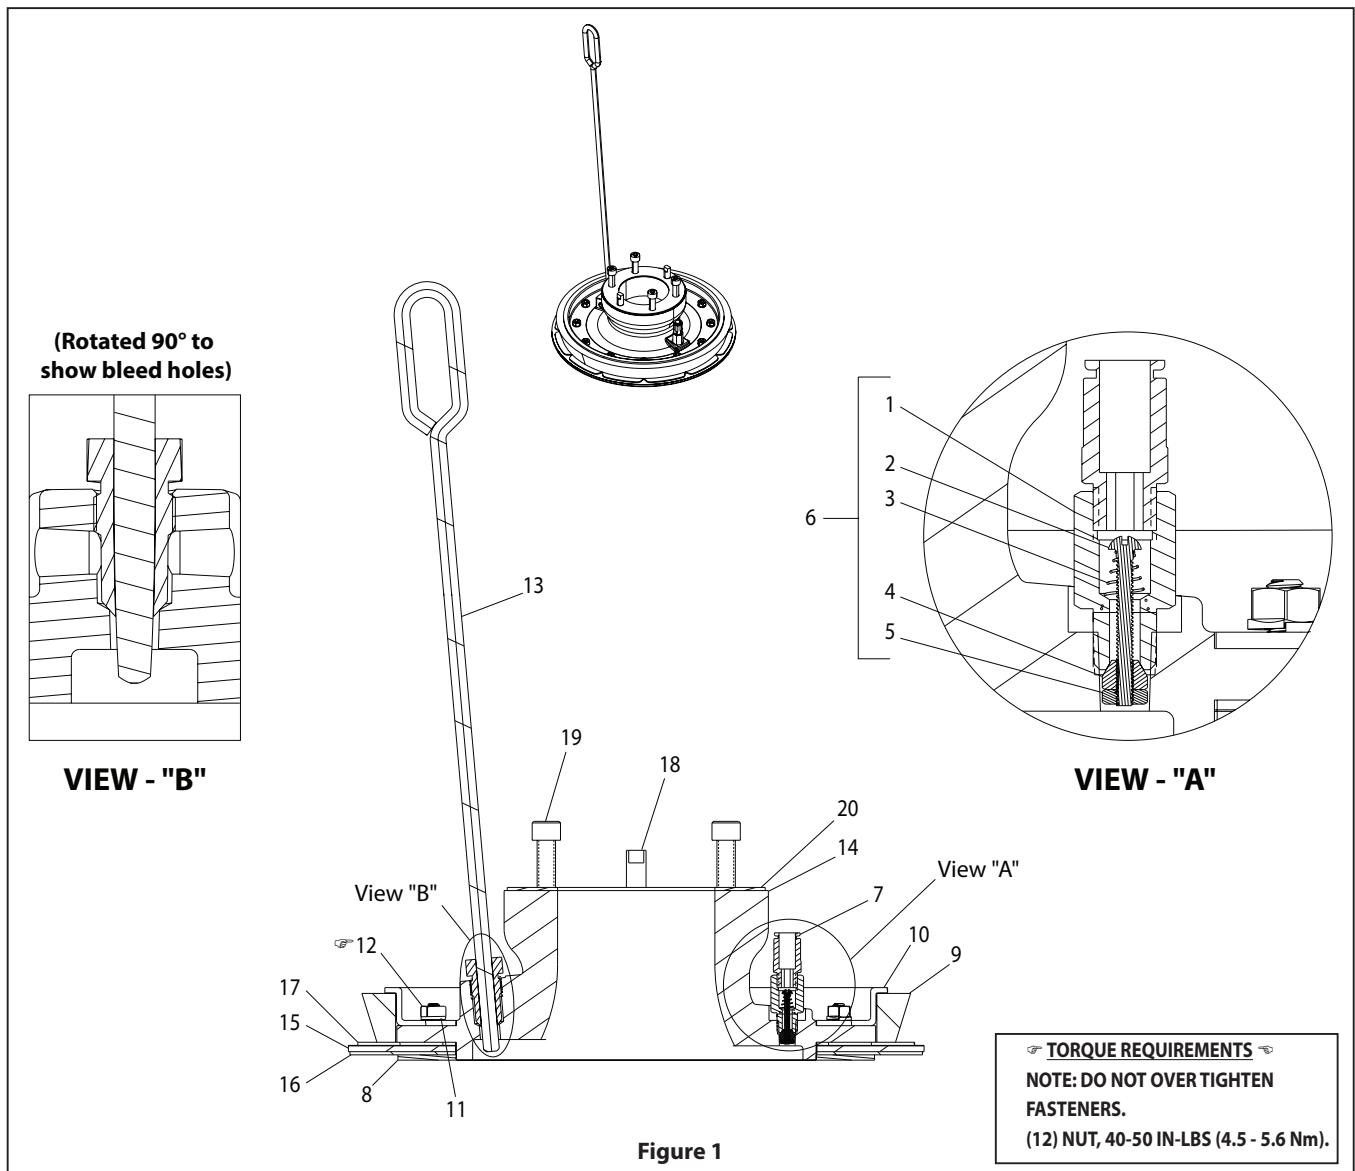

Item	Description (size)	Qty	Part No.	Mtl
1	Check Valve Body (1/8 - 27 NPTF - 1)	(1)	93987	[SS]
2	Machine Screw (#4 - 40 x 1")	(1)	Y8-251-S	[SS]
3	Spring	(1)	93989	[SS]
4	Valve Nut	(1)	93986	[T]
5	Nut (#4 - 40)	(1)	Y22-4-S	[SS]
6	Valve Assembly (includes items 1 - 5)	(1)	67130	
7	Connector (1/8 - 27 NPT x 5/16" OD tube)	(1)	59474-58	
8	Base Plate with 1/4 - 20 Studs	(1)	97740	[SS]
9	Modular Backup Ring	(1)	97696	[U]
10	Retaining Ring	(1)	97697	[SS]
11	Lock Washer	(12)	Y14-416-T	[SS]

Item	Description (size)	Qty	Part No.	Mtl
12	Nut (1/4 - 20)	(12)	Y12-4-S	[SS]
13	Vent Plug	(1)	97702	[SS]
14	Adapter	(1)	97949	[SS]
15	Primary Wiper Seal	(1)	97734	[TN]
16	Secondary Wiper Seal	(1)	91086	[Pe]
17	Wiper Support Ring	(1)	97741	[Pe]
18	Stud (3/8 - 16)	(2)	91263	[C]
19	Cap Screw (3/8 - 16 x 1-1/4")	(4)	Y99-63-C	[C]
20	Flat Gasket	(1)	90552	[B]

MATERIAL CODE

[B] = Nitrile [T] = PTFE [U] = Polyurethane
[C] = Carbon Steel [TN] = PTFE Coated Nitrile
[Pe] = Polyethylene [SS] = Stainless Steel

MODEL DESCRIPTION / FOLLOWER PLATE OPTIONS

Pump Size	Follower Plate Material	Seal Type	Seal Material	Seal Diameter	Follower Asm.
Standard Footprint "A"	Stainless Steel	Single Lip	PTFE coated Nitrile / Polyethylene	11.437" (290.5 mm)	67536-1

PRIMARY SEAL DESCRIPTIONS (Item 15)


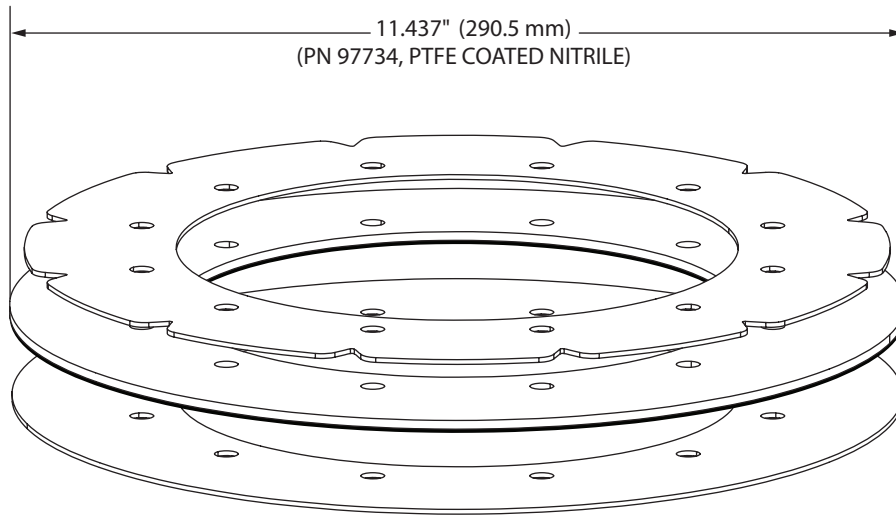



Figure 2

MODULAR BACKUP RING


CONFIGURATION OPTIONS

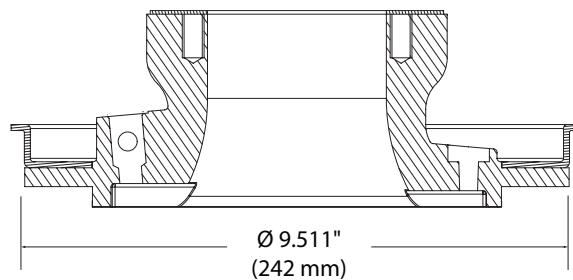

Ideal for tapered pails
Note: Backup ring must
be removed from follower
plate assembly

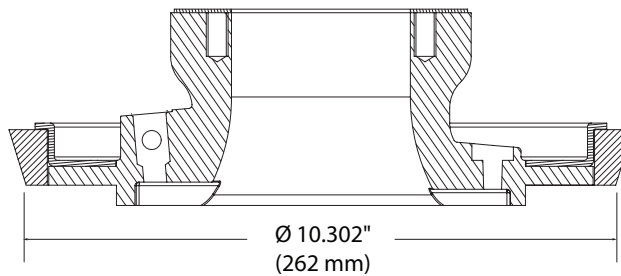

Ideal for various
straight sided pails

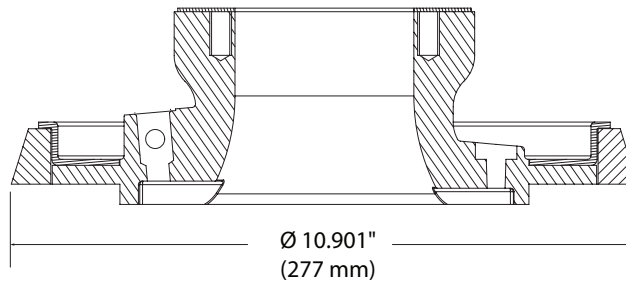

Ideal for various
straight sided pails

Figure 3