


ATEX Set

Areas of application

- For frequent use and long operating times
- For flammable liquids, flammable acids and alkalis


Contents of delivery

- 1 x 700 W Motor
- 1 x 1200 mm stainless steel pump tube with axial impeller, stainless steel shaft, and polypropylene barrel adapter
- 1 x ATEX dispense kit which includes DN25 brass nozzle, 2 m DN25 solvent hose, 2 brass hose clamps and grounding cable
- 1 x Wall bracket for motor (recommended)

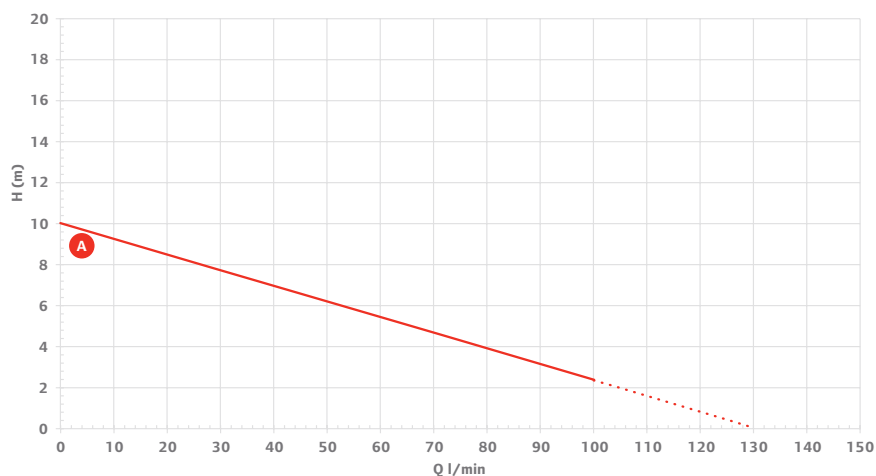

— A (Axial impeller with ATEX dispense kit) (Axial impeller without dispense kit)

Measurement under ideal conditions without pipe friction resistance. Basis: 1 mPas, 20°C, +/- 10%

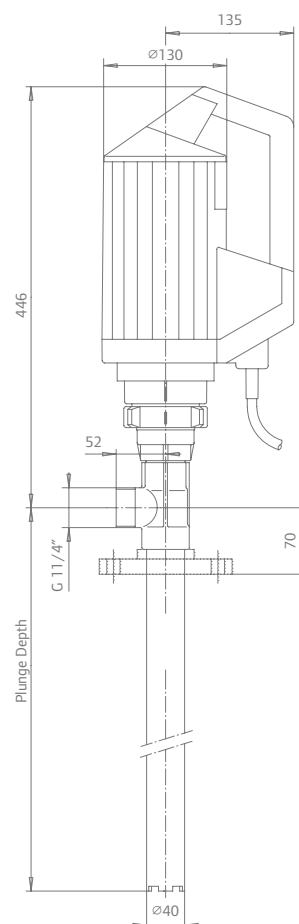

Note: Dimensions in mm

Technical Data

Flow rate	Up to 130 l/min
Power	700 W
Voltage	230 V
Plunge depth	1200 mm
Item No.	DE7A3 + 4000-SAS-12 + 637590-E + FHP10007

*Additional motors and pump tubes available to meet your needs. Contact us for specific application.

Resistant to, among others:

Acetone	Acetylene	Ammonium sulphide
Butanol	Diethylamine	Ethanol
Methanol	Methylamine, (mono)	Methylbutylketone
Methyl formate	Methyl sulphuric acid	Nitroglycol
Perchloric acid	Sodium chlorate	Sodium peroxide

Other media on request