

L07RS-L290RS (7-290 KW) VARIABLE-SPEED ROTARY SCREW COMPRESSORS

LRS-Series



Advanced Technology Inspired Simplicity

A Better Approach


Gardner Denver has a long history of manufacturing compressed air equipment. With our LRS-Series line of products, we have uniquely combined simplicity with cutting edge design. The result—a compressor that delivers outstanding performance with unprecedented serviceability.

The Total Package

Gardner Denver has the total package—extensive compressor and air treatment product lines, sales and service support through our extensive network of authorized local distributors, and industry leading warranty programs. Because we offer more than just compressed air equipment, we can provide solutions that keep you running, protect your production objectives, and save you money.



Choose Gardner Denver

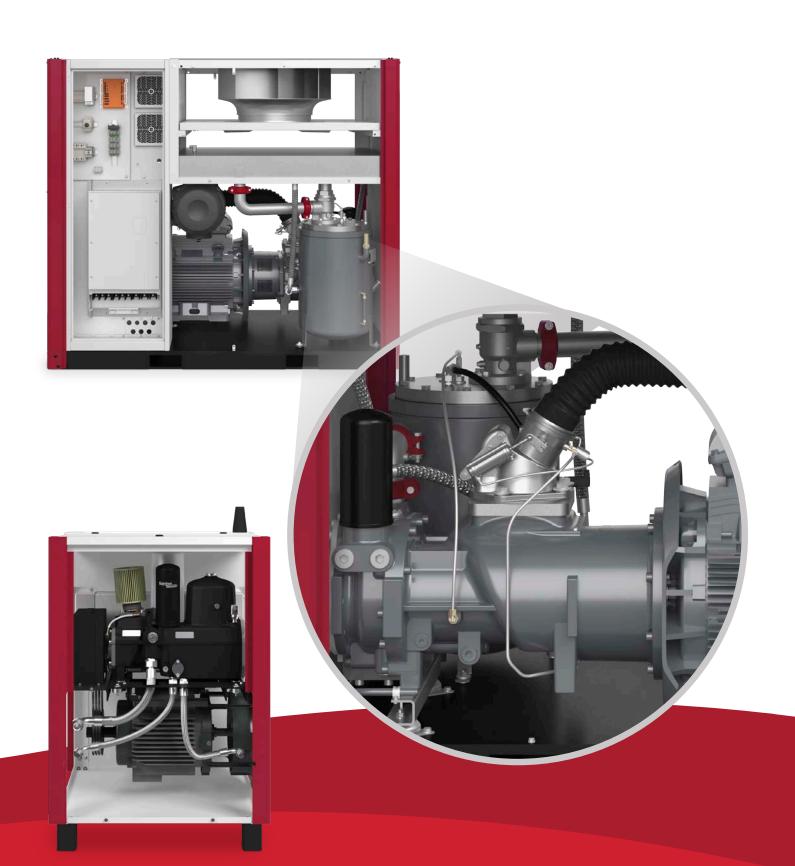






Small Footprint = Cost Savings

Compact, Quiet Compressors

Nearly Silent Noise Levels

The Gardner Denver LRS-Series compressor designs feature high-quality, sound-insulating enclosure panels and a low-noise, thermostatically-controlled, motor-driven fan. These components reduce the noise to whisper-quiet levels and eliminate the need for a separate compressor room, saving money on installation costs.

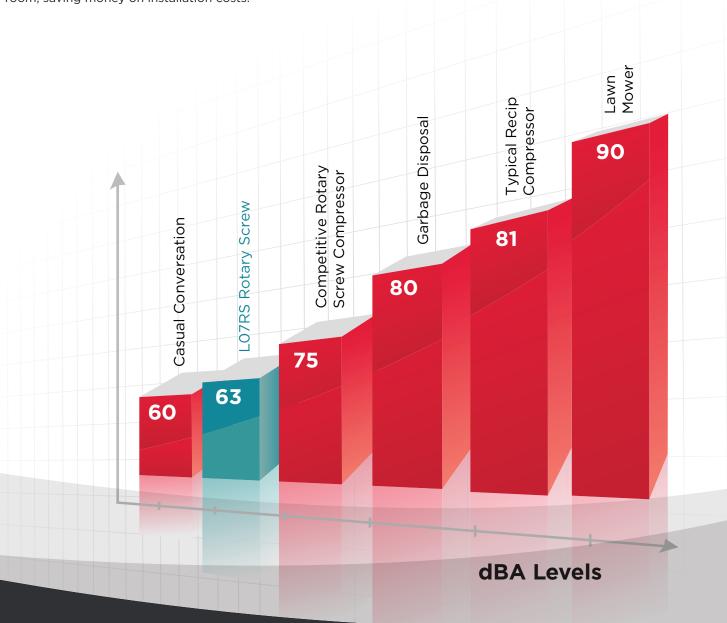

Reduce Energy. Maximize Efficiency. Save Money.

Perfect Response to Your Individual Air Demand


Variable speed compressors from Gardner Denver can efficiently and reliably handle the varying air demand. The right variable speed compressor in the right application delivers significant energy savings and a stable air supply at constant pressure.

Minimize Your Energy Consumption

The largest cost component of a compressor during its lifetime is the power required to operate it. Maximum efficiency at any level of demand cuts energy costs and saves money.



Energy Savings

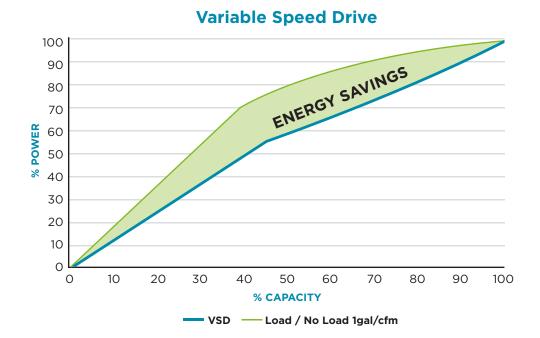


High Efficiency TEFC Motor

Low Life Cycle Costs

Market Leading Energy Savings Lowest kW/100 CFM

Pressure Drop

Specific Power

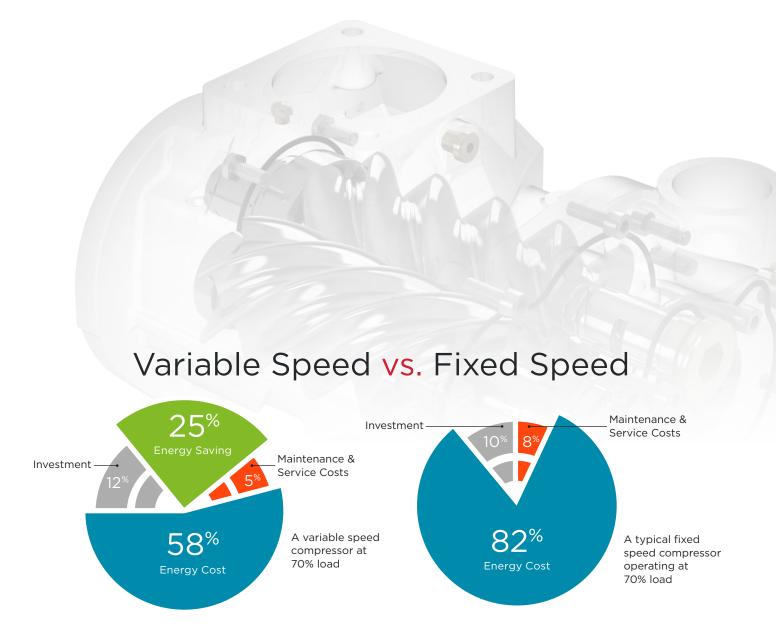

Using a variable speed compressor can easily save 25% energy by using just the right amount of energy required to do the job and no more.

Get in Touch with the Next Generation of Compressor Controllers

State-of-the-Art

Gardner Denver completes its industry leading compressor packages with state-of-the-art touch screen controllers: the GD Pilot and Governor™. Featuring cutting edge graphics that provide necessary compressor data and full color schematics in seconds, the Governor™ is now available on select L-Series and LRS-Series compressors models.

Governor™ Touchscreen Controller Features

- Available on L15RS-L290RS compressor models
- User-friendly navigation with state-of-the-art graphics and design
- Machine status available on a 7-inch, full color touchscreen display for L30RS-L290RS and a 4.3-inch display for L15RS-L29RS
- Detailed schematics at your fingertips
- Advanced machine diagnostics
- Data logging and iConn connection
- Web server to allow access to the Governor[™] from your desktop





GD Pilot Controller Features

- Available on L07RS-L11RS compressor models
- Real time clock
- Second pressure setting
- Discharge/line/network pressure data displayed
- Advanced fault history log
- Programmable inputs and outputs
- Auto restart after power failure
- RS485-Modbus RTU standard



your equipment through our industry leading warranty programs.

Protect your investment.



Sales & Service Distributors Across America

Always Within Reach

Our extensive network of factory-trained, authorized distributors ensures your sales, service, and technical support needs are addressed without delay.

To find a distributor visit: www.GardnerDenver.com

Protect Your Equipment for Longer Life

At Gardner Denver, our engineering philosophy is centered on creating equipment that is high quality and reliable, giving you confidence in your investment. Our Platinum Series service offerings are tailored to provide the best possible support to your compressed air systems, allowing you to focus on your operations.





Platinum Guard is a preventative maintenance agreement serviced by Gardner Denver Authorized Distributors using genuine OEM parts and lubricants. **Guard your investment** with a service plan that keeps your compressor (and operations) running with few interruptions.

The multi-year Platinum Trust service agreement offers peace of mind with extended coverage beyond the major components—the entire compressor package is included. Protect your equipment against unforeseen events with this service offering and guarantee consistent, reliable coverage from partners you trust.

LO7RS-L29ORS ROTARY SCREW COMPRESSOR

| MODEL | DRIVE MOTOR | | 50 HZ | | | 60 HZ | | | | NOISE | WEIGHT3 | | DIMENSIONS | |
|--------|----------------|-----|---------------------|---------------------|----------------------------|-------------------------|---------------------|---------------------|----------------------------|-------------------------|--------------------|---------------------|------------|--|
| | | | NOMINAL PRESSURE | | FAD | | NOMINAL PRESSURE | | FAD¹ | | LEVEL ² | WEIGHT ³ | | L×W×H |
| | HP | KW | PSIG | BAR | ACFM | M³/MIN | PSIG | BAR | ACFM | M³/MIN | DB(A) | LBS | KG | IN. (MM) |
| L07RS | 10 | 7 | 100 130 190 | 6.9 9.0 13.1 | 44.5 35.7 29.3 | 1.26 1.01 0.83 | 110 130 190 | 7.6 9.0 13.1 | 42.9 37.6 27.9 | 1.22 1.07 0.79 | 63 | 489 | 222 | _ 27 × 25 × 41 _ (686 × 635 × 1041) |
| L11RS | 15 | 11 | 100 130 190 | 6.9 9.0 13.1 | 63.9 55.1 44.5 | 1.81 1.56 1.26 | 110 130 190 | 7.6 9.0 13.1 | 62.1 56.9 43.5 | 1.76 1.61 1.23 | 64 | 509 | 231 | |
| L15RS | 20 | 15 | NA | NA | NA | NA | 110 130 190 | 7.6 9.0 13.1 | 88.3 79.7 59.2 | 2.50 2.26 1.68 | 74 | 945 | 429 | |
| L18RS | 25 | 18 | NA | NA | NA | NA | 110 130 190 | 7.6 9.0 13.1 | 106.4 95.0 77.5 | 3.01 2.69 2.20 | 74 | 945 | 429 | 32 × 35 × 50 (881 × 820 × 1274) |
| L22RS | 30 | 22 | NA | NA | NA | NA | 110 130 190 | 7.6 9.0 13.1 | 124.6 116.0 90.7 | 3.53 3.29 2.57 | 74 | 945 | 429 | |
| L23RS | 30 | 22 | 100 130 190 | 6.9 9.0 13.1 | 145.8 132.1 102.1 | 4.13 3.74 2.89 | 110 145 190 | 7.6 10.0 13.1 | 145.5 123.5 102.1 | 4.12 3.50 2.89 | 68 | 1501 | 681 | 53 × 35 × 64 (1345 × 880 × 1612) |
| L26RS | 35 | 26 | 100 130 190 | 6.9 9.0 13.1 | 169.2 154.0 125.7 | 4.79 4.36 3.56 | 110 145 190 | 7.6 10.0 13.1 | 168.9 144.9 125.7 | 4.78 4.10 3.56 | 70 | 1561 | 708 | |
| L29RS | 40 | 30 | 100 130 190 | 6.9 9.0 13.1 | 191.4 171.6 134.9 | 5.42 4.86 3.82 | 110 145 190 | 7.6 10.0 13.1 | 190.9 159.0 134.9 | 5.41 4.50 3.82 | 70 | 1570 | 712 | |
| L30RS | 40 | 30 | 100 125 145 | 6.9 8.6 10.0 | 194.2 179.0 169.8 | 5.50 5.07 4.81 | 110 125 145 | 7.6 8.6 10.0 | 194.3 182.5 170 | 5.51 5.17 4.82 | 68 | 2039 | 925 | 68 × 37 × 66 (1722 × 920 × 1659) |
| L37RS | 50 | 37 | 100 125 190 | 6.9 8.6 13.1 | 238.3 221.0 182.5 | 6.75 6.26 5.17 | 110 125 190 | 7.6 8.6 13.1 | 238.5 224.6 182.5 | 6.75 6.36 5.17 | 69 | 2099 | 952 | |
| L45RS | 60 | 45 | 100 125 190 | 6.9 8.6 13.1 | 277.5 258.0 216.0 | 7.86 7.31 6.12 | 110 125 190 | 7.6 8.6 13.1 | 277.0 262.3 216.3 | 7.85 7.43 6.13 | 71 | 2147 | 974 | |
| L55RS | 75 | 55 | 110 125 145 | 7.5 8.6 10.0 | 361.3 341.1 318.6 | 10.2 9.7 9.0 | 110 125 145 | 7.6 8.6 10.0 | 364.7 344.0 318.0 | 10.33 9.74 9.00 | 69 | 3732 | 1693 | _ 85 × 49 × 78 (2159 × 1222 × 1971) |
| L75RS | 100 | 75 | 110 145 190 | 7.5 10.0 13.0 | 463.4 410.5 362.5 | 13.1 11.6 10.3 | 110 125 190 | 7.6 8.6 13.1 | 473.4 448.4 367.8 | 13.41 12.70 10.41 | 72 | 3895 | 1767 | |
| L90RS | 125 | 90 | 100 125 190 | 6.9 8.6 13.1 | 612.8 571.5 450.4 | 17.36 16.19 12.76 | 100 130 190 | 7.6 9.0 13.1 | 627.3 593.0 464.8 | 17.76 16.79 13.26 | 77 | 6102 | 2768 | 92 × 54 × 81 (2337 × 1372 × 2039) |
| L110RS | 150 | 110 | 100 125 190 | 6.9 8.6 13.1 | 731.1 679.2 551.4 | 20.71 19.24 15.62 | 100 130 190 | 7.6 9.0 13.1 | 742.7 704.6 581.5 | 21.03 19.95 16.46 | 77 | 6107 | 2770 | |
| L132RS | 180 | 132 | 100 125 190 | 6.9 8.6 13.1 | 802.4 747.7 609.3 | 22.73 21.18 17.26 | 100 130 190 | 7.6 9.0 13.1 | 819.7 781.4 642.4 | 23.21 22.13 18.19 | 78 | 6142 | 2786 | |
| L160RS | 215 | 160 | 100 125 190 | 6.9 8.6 13.1 | 1116.5 1045.7 836.8 | 31.62 29.61 23.70 | 100 125 190 | 6.9 8.6 13.1 | 1119.2 1049.8 819.7 | 31.69 29.73 23.21 | 76 | 9652 | 4378 | 115 × 82 × 86 (2907 × 2071 × 2193) |
| L200RS | 270 | 200 | 100 125 190 | 6.9 8.6 13.1 | 1368.0 1299.1 1051.9 | 38.74 36.79 29.79 | 100 125 190 | 6.9 8.6 13.1 | 1365.2 1291.3 1027.3 | 38.66 36.57 29.09 | 78 | 10082 | 4573 | |
| L250RS | 340 | 250 | 100 125 190 | 6.9 8.6 13.1 | 1477.3 1401.0 1138.9 | 41.83 39.67 32.25 | 100 125 190 | 6.9 8.6 13.1 | 1466.0 1369.8 1091.6 | 41.51 38.79 30.91 | 79 | 10293 | 4669 | |
| L290RS | 390 | 290 | 100 125 190 | 6.9 8.6 13.1 | 1620.7 1542.6 1250.4 | 45.89 43.68 35.41 | 100 125 190 | 6.9 8.6 13.1 | 1605.6 1504.0 1201.0 | 45.47 42.59 34.01 | 81 | 10326 | 4684 | |

¹⁾ Data measured and stated in accordance with ISO1217, Ed. 4, Annex C & Annex E at the following conditions:

Air Intake Pressure 1 bar A, Air Intake Temperature 20° C, Humidity 0 % (Dry).

2) Noise levels are for air-cooled and water-cooled models, and measured in free field conditions in accordance with ISO 2151, tolerance +/- 3 dB.

³⁾ Weights are for air-cooled models.

The leader in every market we serve by continuously improving all business processes with a focus on innovation and velocity



1800 Gardner Expressway Quincy, IL 62305 www.gardnerdenver.com









©2025 Industrial Technologies and Services, LLC Printed in U.S.A. GS-L07RS-L290RS 15th Ed. 7/25

