

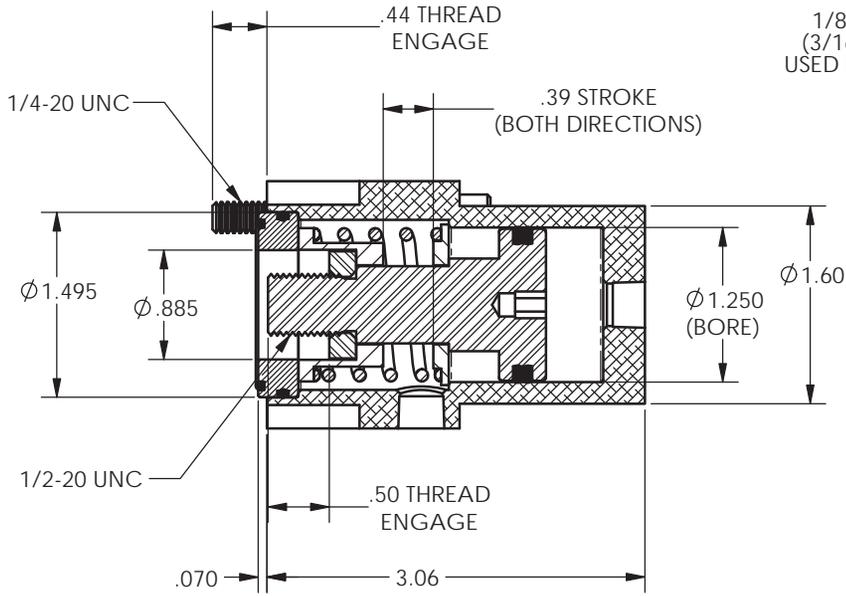
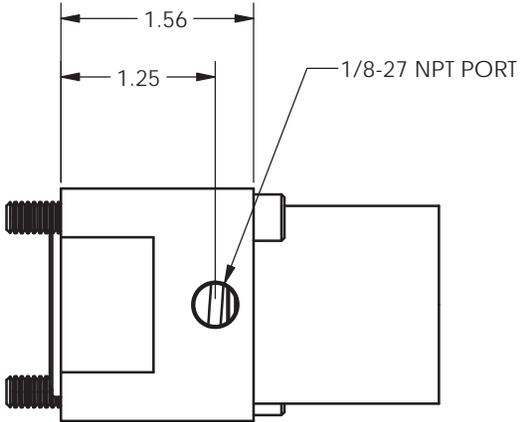


8 7 6 5 4 3 2 1


REVISIONS				
ECR	REV	DESCRIPTION	DATE	APPROVED
E1759	-	See Sheet1	06/26/2012	JUMPER

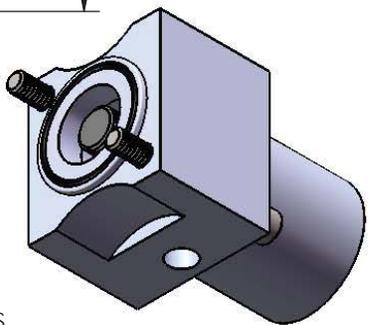

1/8-27 NPT PORT
(3/16 HEX ACCESS
USED FOR CYL. MTG.)

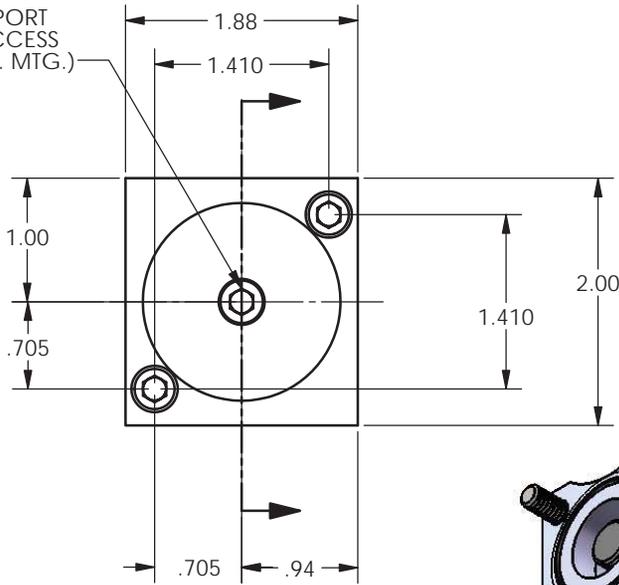

1. NEUTRAL POSITION SHOWN
2. SPRING PRELOAD = 27 LBS
3. MIN. EXTENSION FORCE @ 100 PSI AT FULL STROKE = 83 LBS
4. MIN. RETRACT FORCE @ 100 PSI AT FULL STROKE = 39 LBS



DO NOT SCALE DRAWING
UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
DECIMALS
.X = ±.03
.XX = ±.010
.XXX = ±.005
FRACTION = ±.015
ANGLES = ±1/2°

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF APSCO Inc.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION OF APSCO Inc. IS PROHIBITED.

SURFACE TEXTURE OR BETTER
MATERIAL N/A
FINISH N/A



TITLE: AIR ACT FOR V40 HYD VAL			
DWG. NO. C-3540-DM		REV -	
SIZE B	DRAWN JUMPER	DATE 06/26/2012	CLASS CYL
F/N:C-3000 SERIES			SHT. 2 OF 2

8 7 6 5 4 3 2 1

D

C

B

A

D

C

B

A