

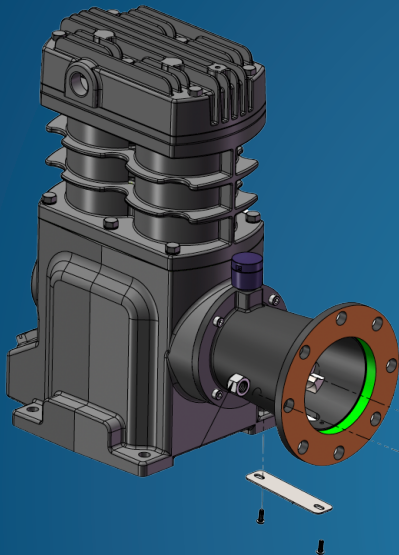


STC35DM-2

Oil Lubricated Piston Compressor for Pressure Discharge

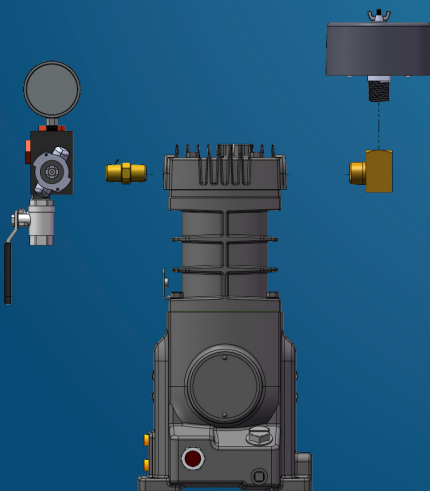

- The STC35DM-2 is engineered for extreme performance with minimal noise.
- Narrow profile fitting inside truck frame.
- The STC35DM-2 is one of the lightest machines in its class.
- Quiet operation due to heavy duty construction.
- High airflow means the STC35DM-2 will build tank pressure quickly.

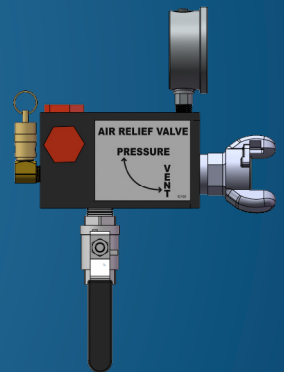

The STC35DM-2 is available with all accessories needed to fit to the vehicle, including:


- Relief Valve
- Check Valve
- Delivery Pipework
- Hydraulic Motor
- Hot Air Hose
- Hydraulic Drive Coupling

ADVANCED DESIGN & PERFORMANCE FROM APSCO

25 PSI				36 PSI		
Speed	CFM	HP	Potential Liquid Flow (GPM)	CFM	HP	Potential Liquid Flow (GPM)
500 rpm	12	1.5	38	11	1.6	25
800 rpm	19	2.7	61	18	2.8	40
1000 rpm	24	3.5	79	22	3.6	50
1200 rpm	30	4.3	95	27	4.4	59
1350 rpm	35	4.9	105	29	4.8	67
1500 rpm	39	5.4	125	32	5.2	75

Note: It is recommended that the P40 be operated at 1350 rpm.

Dimensions

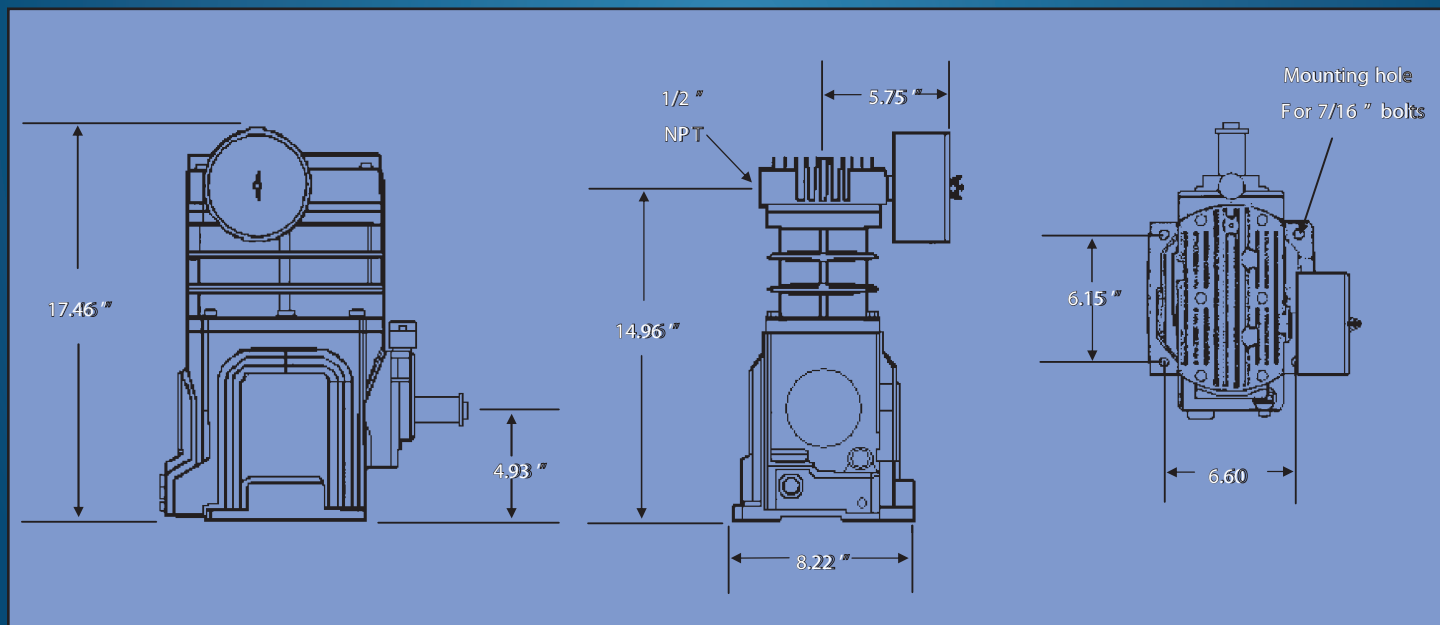

Specifications

- Two Cylinder, Single Stage
- Cast Iron Construction
- Speed Max. 0-1500 rpm
- 1310 Series Flange
- Weight 80 lbs
- Bi-rotational

SEE OUR COMPLETE LINE AT APSCOPOWER.COM

