
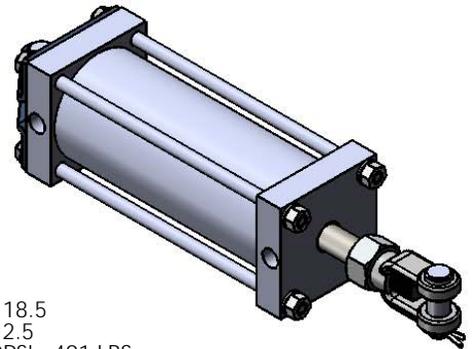



| REVISIONS | | | | |
|-----------|------|-------------|------------|----------|
| ECR | REV. | DESCRIPTION | DATE | APPROVED |
| E2520 | - | See Sheet1 | 07/24/2014 | PEREZ |

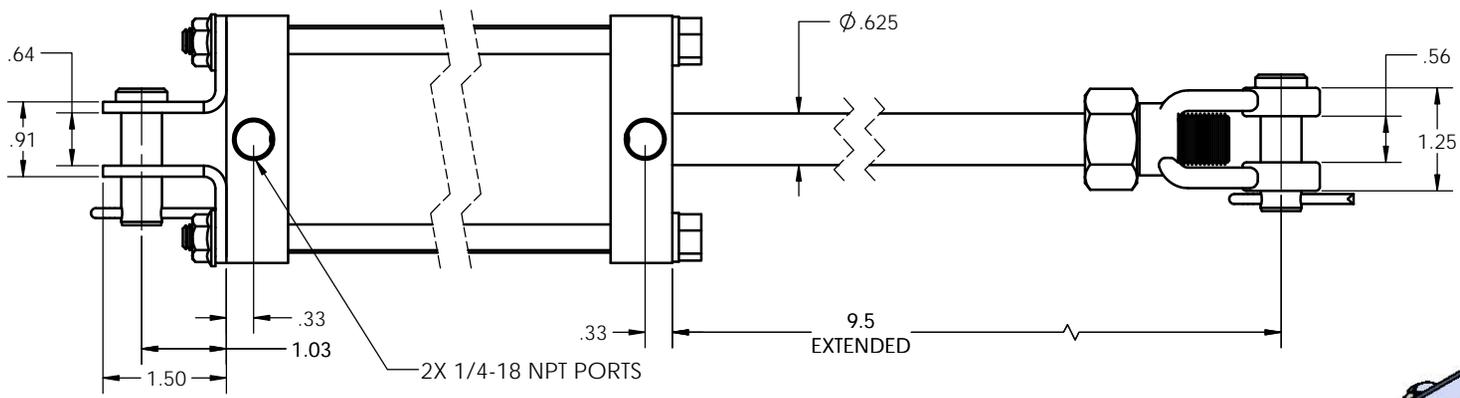


NOTES:

- BORE = Ø2.5"
- STROKE = 6.0
- RETRACTED PIN TO PIN = 18.5
- EXTENDED PIN TO PIN = 12.5
- EXTENSION FORCE @ 100PSI= 491 LBS
- RETRACT FORCE @ 100PSI= 460 LBS

PORTS ON TOP

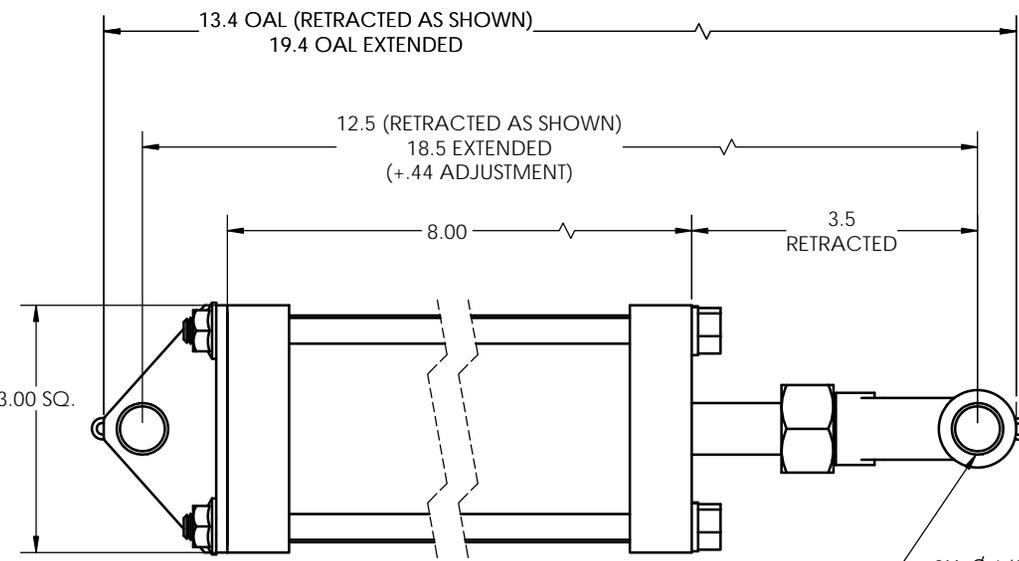

| | | | | | | |
|---|--|---|---|--|-------------------------------|-------------|
| TYPE OF PROJECTION  THIRD ANGLE PROJECTION | DO NOT SCALE DRAWING UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: DECIMALS .X = ±.03 .XX = ±.010 .XXX = ±.005 FRACTION = ±.015 ANGLES = ±1/2°  |  8178 EAST 44TH STREET TULSA, OK 74145 | | | | |
| | | PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF APSCO Inc.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION OF APSCO Inc. IS PROHIBITED. | SURFACE TEXTURE OR BETTER MATERIAL N/A FINISH N/A | TITLE: 2.5 x 6 CYL W/SS ROD & PIN KIT | DWG. NO. C-5026S-PK | |
| | | SIZE B | DRAWN PEREZ | DATE 07/24/2014 | REV - | CLASS |
| F/N: C-5000 SERIES MASTER | | | | | | SHT. 2 OF 2 |

8 7 6 5 4 3 2 1

D

C

B

A

8 7 6 5 4 3 2 1