
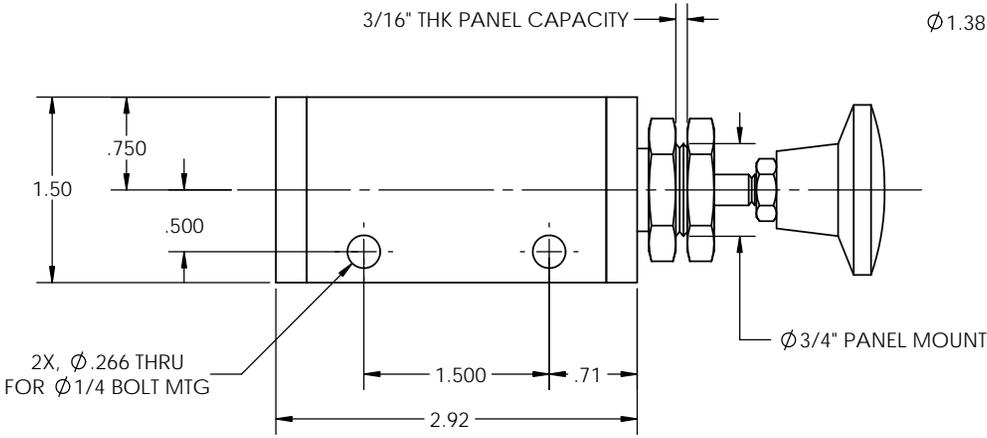
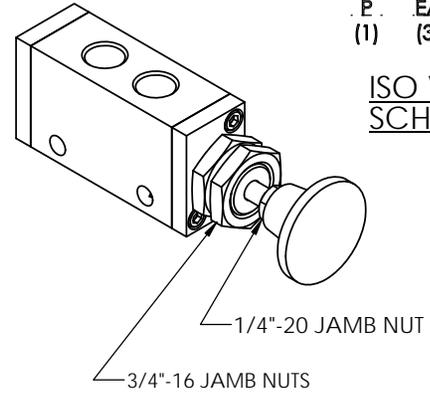
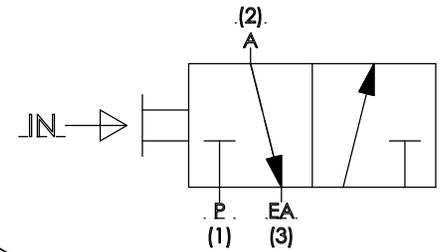




8 7 6 5 4 3 2 1

REVISIONS				
ECR	REV.	DESCRIPTION	DATE	CHG BY
E2218	-	NEW RELEASE	09/13/13	GK

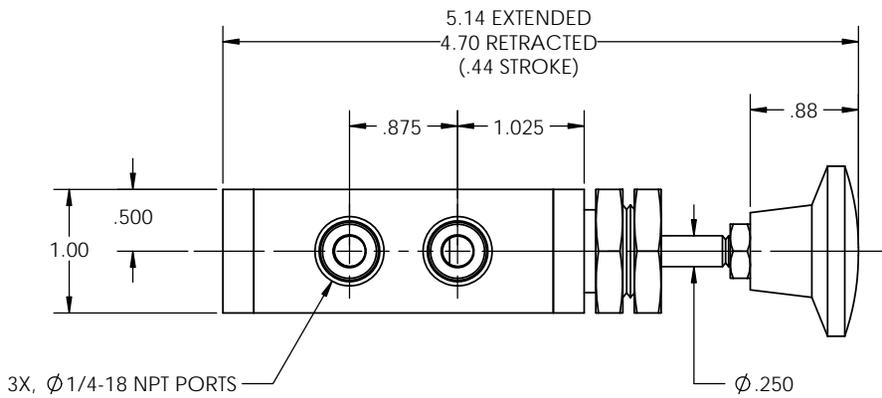

SPECIFICATIONS:

VALVE TYPE	PNEUMATIC, 3 WAY, 2 POSITION
NUMBER OF PORTS	3
PORT SIZE	1/4"-18 NPT
VALVE OPERATOR	MANUAL, PUSH/PULL
MAX FLOW	43 SCFM @ 100 PSI
OPERATING RANGE	0-130 PSI
LENGTH x WIDTH x HEIGHT	6.01 x 1.50 x 1.38

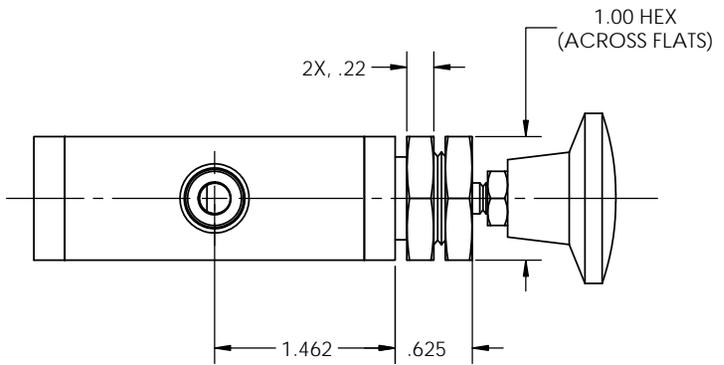

DO NOT SCALE DRAWING
UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
DECIMALS
.X = \pm .03
.XX = \pm .010
.XXX = \pm .005
FRACTION = \pm .015
ANGLES = \pm 1/2°

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF APSCO Inc.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION OF APSCO Inc. IS PROHIBITED.

SURFACE TEXTURE OR BETTER	
MATERIAL	NA
FINISH	NA



TITLE: VALVE -3WAY, 3 PORT PUSH-PULL			
DWG. NO.		REV	
VX-3		-	
SIZE	DRAWN	DATE	CLASS
B	GK	07/16/2013	VALVE
F/N:VX-3			SHT. 2 OF 2

8 7 6 5 4 3 2 1