

Oxygen Generators

MULTI SEP Series



The Premium Performance


The unique MULTISEP design provides consistent high flow rates of oxygen with minimum footprint. Together with molecular sieve protection from moisture to, substantially lower the service costs, extend the lifetime and reduce costs.

Standard Features

- Built in purity analyzer for constant monitoring
- Colour touch screen control
- Modbus TCP. Ethernet connection
- Remote start/stop relay
- Data-logging via USB interface

Key Benefits

- Zeolite anti-crush design
- No channelling effect
- Minimized footprint
- Molecular sieve protection
- Siemens based control system
- Stainless steel piping
- Designed for dynamic pressure loading

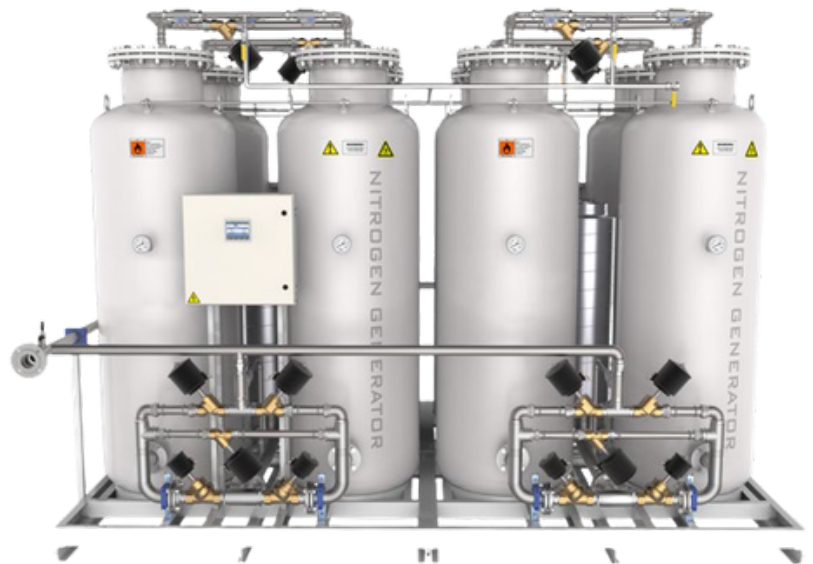

Notes

- Performance data is based on 7 barG inlet pressure and 20°C to 30°C ambient temperature
- Flow stated in cubic meter (m³) is with reference conditions, Temperature: 20°C, Pressure: 1.013 barA
- Conversion factor for m³ with reference conditions, Temperature: 0°C, Pressure: 1.013 barA is 0.69 m³/kg
- Designs and specifications are subject to change without notice or obligation

Model	Oxygen capacity					
	90%		93%		95%	
	kg/h	m ³ /h	kg/h	m ³ /h	kg/h	m ³ /h
O80T	122.6	92.2	114.6	86.2	103.1	77.5
O100T	152	114.3	142.1	106.8	127.9	96.2
O125T	187.3	140.8	175	131.6	157.5	118.4
O150T	231.2	173.8	216.1	162.5	194.5	146.2
O3080	183.9	138.3	171.9	129.2	154.7	116.3
O3100	228.1	171.5	213.2	160.3	191.8	144.2
O3125	280.9	211.2	262.5	197.4	236.3	177.6
O3150	346.8	260.8	324.2	243.7	291.7	219.3
O4080	245.2	184.4	229.2	172.3	206.3	155.1
O4100	304.1	228.6	284.2	213.7	255.8	192.3
O4125	374.5	281.6	350	263.2	315	236.8
O4150	462.5	347.7	432.2	325	389	292.5
O5080	306.6	230.5	286.5	215.4	257.9	193.9
O5100	380.1	285.8	355.3	267.1	319.7	240.4
O5125	468.1	352	437.5	328.9	393.8	296.1
O5150	578.1	434.7	540.3	406.2	486.2	365.6

Operating conditions

- **Ambient temperature range:** 5°C to 50°C
- **Oxygen outlet pressure:** 4 - 6 bargG
- **Oxygen dew point:** -50°C (-70°C)
- **Air inlet pressure:** 7.5 to 10 barG
- **Inlet air quality ISO:** 8573.1:2010 class 1.4.1
- **Pressure dew point:** 3°C
- **Filtration grade:** 0.01 micron
- **Power supply:** 110-240V / 50-60Hz

Typical applications

- Fish farming
- Glass/Metal production and processing
- Gold leaching

Optional add-ons

- **Flow control valve** – flow & purity adjustment
- **Energy saving valve** – reduces compressed air usage during turn down
- **Purity control** - off spec purge
- **Sequential start/stop** – one button operation
- **SMS alarm**
- **Remote monitoring**
- **Audio-visual alarm** and others
- Ozone production
- Veterinary
- Water treatment
- Cutting/Welding



Ingersoll Rand Inc. (NYSE:IR), driven by an entrepreneurial spirit and ownership mindset, is dedicated to helping make life better for our employees, customers and communities. Customers lean on us for our technology-driven excellence in mission-critical flow creation and industrial solutions across 40+ respected brands where our products and services excel in the most complex and harsh conditions. Our employees develop customers for life through their daily commitment to expertise, productivity and efficiency. For more information, visit www.IRCO.com

IngersollRand.com



Ingersoll Rand, IR, the IR logo, and PackageCARE are trademarks of Ingersoll Rand, its subsidiaries and/or affiliates. All other trademarks are the property of their respective owners. Ingersoll Rand compressors are not designed, intended or approved for breathing air applications. Ingersoll Rand does not approve specialised equipment for breathing air applications and assumes no responsibility or liability for compressors used for breathing air service. Nothing contained on these pages is intended to extend any warranty or representation, expressed or implied, regarding the product described herein. Any such warranties or other terms and conditions of sale of products shall be in accordance with Ingersoll Rand's standard terms and conditions of sale for such products, which are available upon request. Product improvement is a continuing goal at Ingersoll Rand. Any designs, diagrams, pictures, photographs and specifications contained within this document are for representative purposes only and may include optional scope and/or functionality and are subject to change without notice or obligation.

We are committed to using environmentally conscious print practices