



Reciprocating Air Compressors

T30


Ingersoll Rand - T30

A leader in its class since 1929

The Ingersoll Rand T30 has been the leader in its class since it was introduced in 1929. Whether this is measured by reliability, efficiency, rugged flexibility or maintainability, it has no equal. Designed for heavy industrial applications, the two stage reciprocating air compressors provide the quality and performance that exceed customer requirements.


Others may claim to handle heavy duty applications, but the T30 defines the concept. Run it in the most demanding intermediate duty application imaginable. The T30 unique and ideal to meet your demands of a compressor package in the 3-30 HP range.

After all, we've been doing this for over 100 years!

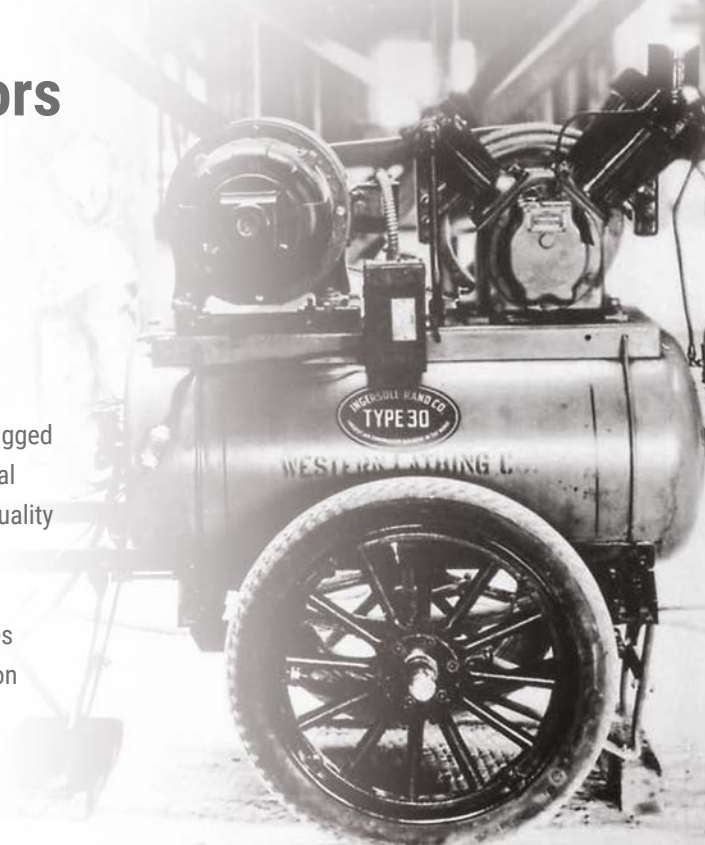

The Inside Story

A two-stage model (1) compresses air to an intermediate pressure in the first stage, (2) removes heat of compression through an intercooler, and (3) compresses air to a final pressure in a second compression stage. Two-stage compressors are more efficient and are generally used for pressures above 100 PSI (maximum pressure to 175 PSI).

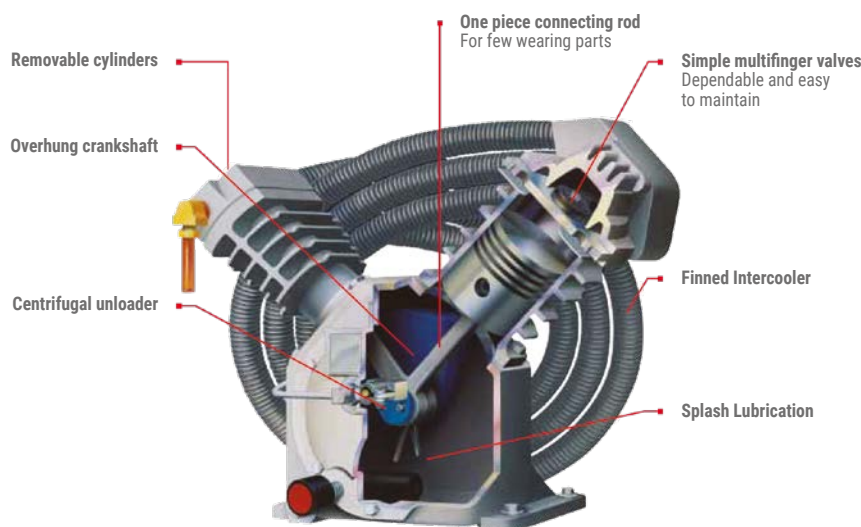

No other Reciprocating Compressor offers these efficient, cost-saving features:

A durable cast iron pump which provides 15,000+ hours of trouble-free service

A 100% copper finned intercooler lowers operating temperatures and extends pump life

An overhung crankshaft and single-piece connecting rod allow access to the running gear for easy maintenance

Individually cast cylinders provide flexible, less expensive maintenance on just one cylinder at a time rather than servicing the entire pump

Electric-Driven Two Stage – Air Cooled

Designed for heavy shop or industrial use, Ingersoll Rand Two-Stage electric air compressors provide the quality and performance that are ideal for most applications and users, including: automotive service and body shops; fleet maintenance; machine shops; production and manufacturing lines; construction; wood working shops; dry cleaners; car washes; maintenance/repair shops and farms.

- Durable cast-iron, two-stage design offers extended pump life for years of trouble-free service
- 175 PSI maximum operating pressure
- 100% continuous duty for tough applications
- Automatic start/stop control/pressure switch operation
- Includes motor starter, oil sight glass (10-15 HP only), manual drain



Model	Motor Range At Working Pressure	Free Air Delivery m³/hr (cfm) Horizontal		Air Receiver
	hp	7.03 kg/cm²g	12.3 kg/cm²g	m³ (lit.)
2340	3	15.12 (8.90)	22.00 (13.00)	0.150 (150) – 0.225 (225)*
2475	5 – 10	24.34 (14.32) – 30.90 (18.20)	23.78 (13.99) – 43.30 (25.00)	0.225 (225) – 0.300 (300)*
2545	7.5 – 12.5	60.30 (35.50)	59.46 (35.00)	0.300 (300) – 0.500 (500)
7100	12.5 – 20	80.16 (47.20)	79.50 (46.80)	0.300 (300) – 0.500 (500)
15T	15 – 30	133.50 (79.40)	133.02 (78.30)	0.500 (500)

Performance for above models available on request for higher working pressure upto 17.5 kg/cm² g. All performance details subject to tolerance as per IS-5456.

Conversion Details :

- 1 cfm = 0.02831 m³/min
- 1 m³ = 1000 litres

- 1 psi = 0.07031 kg/cm²
- 1 hp = 0.746 kW

Electric-Driven Two Stage – Non Lubricated Air Cooled



Ingersoll Rand Two-Stage Non-Lubricated cylinder air compressors are designed to provide instrument-quality air at the highest reliability.

Application

Pharmaceutical Industries; Petroleum Industries; Laboratories; Building Material; Electrical and Electronic; Textile Industries; Food Processing; Hospitals; Chemical; Spray Painting; Discharge is free from oil contaminant.



Model	Motor	RPM	Tank	Piston Displacement		Nomenclature	Air Receiver m³	Overall Dimensions (mm/inch)		
	hp		ltr	cfm	lpm		ltr	Length	Width	Height
7TNL	7.5	550	300	25	708	7TNL D 7.5 CSC	0.300 (300)	1870 (73.62)	705 (27.5)	1395 (55)
7TNL	12.5	800	300	36.3	1028	7TNL D 12.5 CSC	0.300 (300)	1870 (73.62)	705 (27.5)	1395 (55)
15TNL	15	600	500	54.5	1543	15TNL E 15 CSC	0.500 (500)	2045 (80.5)	850 (33.46)	1715 (67.52)
15TNL	20	750	500	68.1	1928	15TNL E 20 CSC	0.500 (500)	2045 (80.5)	850 (33.46)	1715 (67.52)

Type: LP Control: CSC Max. Pressure: 125psig • 1) For Model 7TNL size is 5" & 3"x 4" stroke 2) For Model 15TNL size is 5" & 5" & 4.25" x 4" stroke

* Option available as base plate mounted.

Electric-Driven Single Stage – Portable Air cooled

Our Single-Stage electric air compressors are ideal for most professional compressor user. Each air compressor features durable cast-iron construction, 100% continuous duty cycle for the toughest applications and extended pump life for years of trouble-free service.

- Durable cast-iron construction
- Industrial quality design
- 125 PSI maximum operating pressure



Model	Motor	Piston Displacement		Maximum Working Pressure		Air Receiver Option
	hp	m ³ /hr	cfm	Bar	psig	ltr
SS-1	1	6.99	4.12	8.62	125	60 / 100
SS-2	2	14.01	8.25	8.62	125	100 / 150
SS-3	3	23.36	13.75	8.62	125	100 / 150
SS-5	5	42.57	25.06	8.62	125	150

All performance details subject to tolerance as per IS-5456. Above models are available with single phase motor also.

Electric-Driven Two & Three Stage – High Pressure

Ingersoll Rand multi-stage high pressure air compressors are designed for high pressure applications. These compressors have extra heavy-duty components and are designed for minimum maintenance and maximum performance. High pressure air compressors are widely used in power generation plant, PET blow moulding industry, military, diving and component testing.

- Durable cast-iron with two, three and four stage design
- Intermediate duty applications
- Extended pump life for years of trouble-free service



Model	Motor	Free Air Delivery cfm At Working Pressure		
	hp	350 psig	35.1 kg/cm ² g	70.3 kg/cm ² g
231	3	–	4.80	–
251	5	–	6.45	–
7T4	5	–	7.86	6.40
7T2	12.5	–	21.60	–
15T2	20/25	–	37.70	36.96
15T	20	50	–	–

High Pressure Receiver Mounted Package

Model	Motor	Free Air Delivery cfm At Working Pressure	
	hp	350 psig	35.1 kg/cm ² g
251 Package	5	–	6.45
7T2 Package	10-12.5	–	21.60
15T2 Package	20	–	37.70
15T2 Duplex Package	40	–	75.40
15T Package	20	50	–
15T Duplex Package	40	100	–

For high pressure operation, adequate care must be taken for proper selection. Our distributors would be happy to assist you in correct selection of model. Models are also available for higher working pressures upto 351 kg/cm² g. Details available on request.

Electric-Driven Single Stage & Two Stage Dry Type Vacuum Pumps

Vacuum is one of the most versatile of power sources. It can lift, hold, compact, evacuate, move, dehydrate, agitate, actuate, form, rotate, filter, clean and simulate high altitude.

In printing, plastics, materials handling, food processing, packaging, health care and many other industries, vacuum is called upon to perform many essential functions.

All of these requirements are met by the Ingersoll Rand T30 air cooled reciprocating single stage and two stage vacuum pumps.

These pumps achieve vacuum upto 737mm (29.0" Hg) for single stage and upto 754.4mm (29.7" Hg) for two stage configuration, at sea level.

Model	Piston Displacement	Vacuum (Hg)		Motor
	cfm	inch	hp	
V235	21.60	29.00	2.0	
V235T	10.80	29.60	2.0	
V244	34.60	29.00	3.0	
V244T	17.30	29.65	3.0	
V255	60.00	29.00	5.0	
V255T	30.00	29.70	5.0	
7V	110.00	29.00	7.5	
7VT	55.00	29.65	7.5	
15V	149.60	29.20	10.0	
15VT	99.00	29.65	10.0	



Note :

1. Suffix T denotes two stage.
2. These vacuum pumps can be supplied bare or base - plate mounted.
3. Optional Items: Scrubber, Vacuum gauge and Low oil level switch.
4. Performances indicated are at sea level.

OBF

Discover our revolutionary reciprocating compressor, featuring cutting-edge oil bath air inlet filters for extended use in dusty environments. Engineered for peak performance and durability, it sets new standards in air quality and machine longevity. The innovative oil bath filtration system provides unparalleled protection against high dust & debris environment, ensuring optimal compressor performance. Our Clean Air Assurance guarantees the highest-quality compressed air, thanks to the oil bath filters that efficiently capture impurities, moisture, and contaminants. With unparalleled durability, this compressor is a long-term investment for seamless facility operation, finding applications in manufacturing, mining, infrastructure, and more. Versatile, reliable, and built to last, it's the ideal choice for precision and consistency in diverse industries.

Refer same performance table Applicable Range – up to 10 HP for reference.



Note: Models are also available for high working pressure upto 35 kg/cm². Details available on request.



Ingersoll Rand (India) Ltd.

21-30, GIDC Estate, Naroda, Ahmedabad - 382 330, India
Phone: (079) 4070 6200

IngersollRand.com

Customer Support Center 1-800-102-4395
customercareindia@irco.com

Ingersoll Rand Inc. (NYSE:IR), driven by an entrepreneurial spirit and ownership mindset, is dedicated to helping make life better for our employees, customers and communities. Customers lean on us for our technology-driven excellence in mission-critical flow creation and industrial solutions across 40+ respected brands where our products and services excel in the most complex and harsh conditions. Our employees develop customers for life through their daily commitment to expertise, productivity and efficiency. For more information, visit www.IRco.com.

We are committed to using environmentally conscious print practices.

© 2025 Ingersoll Rand