

GHH RAND®

CD26S Jet – Oil free airend for jet starter applications

The CD26S Jet is a single stage, gear driven and oil-free screw compressor block, which is specially designed for Jet Starter applications.


Operating Range

Parameters	Units	Min	Max
Power	kW / hp	46 / 61	314 / 421
Discharge Pressure, abs.	bar / psi	2 / 29	4 / 58
Volume Flow	m ³ /h / cfm	1400 / 824	4232 / 2491

Medium: Air, Inlet temperature 20°C/68°F, Inlet pressure 1 bar(a)/14.5 psi(a); RH: 60%

Technical Data

Parameters	Units	Data
Length	mm / in	967 / 38
Width	mm / in	863 / 34
Height	mm / in	865 / 34
Weight	kg / lbs	750 / 1653

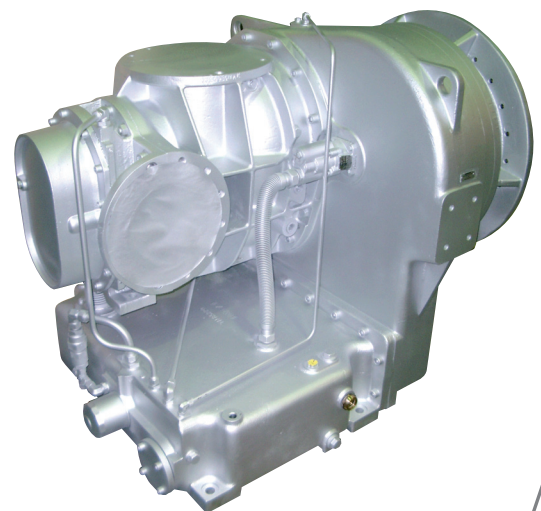

GHH RAND recommends:



- Maximize life and efficiency with Ultralube or Ultralube F (food grade)
- Ask your sales rep. for details

GHH RAND Schraubenkompressoren GmbH
Max-Planck-Ring 27 • 46049 Oberhausen • Germany
Phone +49 (0) 208 9994-0 • Fax +49 (0) 208 9994-111
industrial-sales@ghhrand.com • www.ghhrand.com