



OBERDORFER®

An Ingersoll Rand Business

Pump Selection Charts

MATERIALS OF CONSTRUCTION / OPTIONS

Bronze Rotary Gear Pumps

Centrifugal Pumps

Flexible Impeller Pumps

Chemsteel®
Stainless Steel and Alloy C Pumps



OBERDORFER®

An Ingersoll Rand Business

Pump Selection Chart Flyer

BRONZE ROTARY GEAR PUMPS



				DIFFERENTIAL	50 PSIG		100 PSIG		150 PSIG	
Pump Models			Ports	Nominal Flow	Flow	Power	Flow	Power	Flow	Power
Pedestal	Close Coupled	Carbonator	NPT	*GPM (lpm)	GPM	BHP	GPM	BHP	GPM	BHP
	OBN999	OBN95	1/4	1 (3.8)	0.8	0.09	0.6	0.15	0.4	0.22
OBN1000	OBN991	OBN91, OBN61K, OBN91K	1/4, 3/8	2 (7.6)	1.8	0.17	1.5	0.28	1.2	0.39
OBN2000	OBN992	OBN9206	1/4, 3/8	4 (15.1)	3.5	0.25	3	0.43	2.5	0.68
OBN3000	OBN993		1/2	8 (30.3)	6.6	0.73	6	1.1	5.5	1.4
OBN4000	OBN994		1/2	10 (37.9)	10	1.1	9.4	1.8	9	2.3
OBN7000	OBN970		3/4	20 (75.7)	18.9	1.6	18	2.7	17.4	3.6
OBN9000	OBN990		1	23 (87.1)	22.3	1.7	21.3	2.7	20.1	3.7
OBN9000(R)SX			1 1/4	27 (102.2)	26	2	25.5	3.2	25	4.4
	OBN1100		1 1/4	40 (151.4)	35	2	30	3.5	25	5
OBN11500, OBN11HD			1 1/4	60 (227.1)	56	4	51	6	Intermittent Operation Above 900 RPM	
	OBN1300		1 1/2	60 (227.1)	55	3.5	52	5.5		
OBN13500, OBN13HD			1 1/2	85 (321.8)	84	6.4	81	9.4		
OBN26HD			2	170 (643.5)	169	13	163	19		

*Performance is based on 1725 RPM, Water @ 1 cPs, 68° F (20° C)

Viscosity vs. RPM Limitations					Horsepower Multiplier based on Viscosity					
Liquid @ 70°F	C.P.	C.S.	S.S.U.	RPM	2 PSI	20 PSI	40 PSI	60 PSI	80 PSI	100 PSI
Water	1	1	5	1750	1	1	1	1	1	1
	9	11	50	1750	1	1.05	1	1	1	1
No. 2 Fuel Oil @ 57°F lowest 1800 RPM option	17	22	100	1700	1.1	1.1	1.05	1.05	1	1
	43	54	250	1600	1.2	1.15	1.1	1.1	1.05	1.05
SAE 10 Oil @ 62°F	86	108	500	1500	1.3	1.25	1.2	1.15	1.1	1.1
	130	162	750	1400	1.45	1.35	1.25	1.2	1.15	1.15
SAE 30 Oil @ 72°F lowest 1200 RPM option	173	216	1000	1300	1.6	1.5	1.4	1.3	1.25	1.2
	432	540	2500	1200	1.9	1.75	1.6	1.45	1.35	1.3
SAE 60 Oil @ 70°F	864	1080	5000	1000	2.2	2	1.8	1.6	1.5	1.4
	1296	1620	7500	850	2.6	2.3	2	1.8	1.7	1.6
SAE 70 Oil @ 60°F	1728	2160	10000	600	3	2.6	2.2	2	1.9	1.8
	4320	5400	25000	500	3.5	3	2.7	2.4	2.2	2
No. 6 Fuel Oil @ 70°F	8640	10800	50000	400	4	3.6	3.2	2.8	2.5	2.2
	12960	16200	75000	300	4.5	4.1	3.6	3.15	2.75	2.35

12500 South Pulaski Road - Alsip, IL 60803

Phone (800) 448.1668

www.oberdorferpumps.com



**OBERDORFER®**

An Ingersoll Rand Business

Pump Selection Chart Flyer

CENTRIFUGAL PUMPS



Standard End Suction			Ports	Max Capacity	Max Head		Max Speed
Pedestal	Close Coupled	Mat'l of Construction	Size-Inches	GPM (lpm)	Feet	mH	RPM
OB50P		Bronze	3/8	9 (34)	35	5	4,000
OB60P		Bronze	3/4 x 1/2	25 (94)	68	21	4,000
OB70P		Bronze	1 1/4 x 1	110 (416)	92	28	4,000
OB81PB		Bronze	1 1/2 x 1 1/4	95 (360)	100	20	3,450
OB82PB		Bronze	1 1/2 x 1 1/4	100 (378)	115	35	3,450
OB83PB		Bronze	1 1/2 x 1 1/4	100 (378)	130	40	3,450
	OB101M	Bronze	3/8	9 (34)	25	8	3,450
	OB104M	Bronze	3/4 x 1/2	24 (91)	53	16	3,450
	OB107MB, MA	Bronze	1 1/4 x 1	35 (132)	50	15	3,450
	OB109MB	Bronze	1 1/4 x 1	75 (284)	45	13	3,450
OB119MP		Bronze	1 1/4 x 1	110 (416)	90	27	4,000
	OB170M	Bronze	3/4	12 (45)	17	5	3,450
	OB172B	Bronze	3/4	12 (45)	17	5	3,450
	OB500	Bronze	3/8	9 (34)	28	4	3,450
	OB600	Bronze	3/4 x 1/2	24 (91)	53	16	3,450
	OB700	Bronze	1 1/4 x 1	95 (360)	70	21	3,450
OB800B		Bronze	1 1/4 x 1	70 (26)	200	61	4,000
	OB815B	Bronze	1 1/2 x 1 1/4	100 (378)	95	29	3,450
OB815PB		Bronze	1 1/2 x 1 1/4	100 (378)	95	29	3,450
	OB820B	Bronze	1 1/2 x 1 1/4	100 (378)	120	36	3,450
	OB830B	Bronze	1 1/2 x 1 1/4	100 (378)	140	43	3,450

Self Priming			Ports	Max Capacity	Max Head		Max Speed	Max Lift
Pedestal	Close Coupled	Mat'l of Construction	Size-Inches	GPM (lpm)	Feet	mH	RPM	Feet
OB30PB	OB300B	Bronze	1	24 (91)	35	5	3,800	22
OB75PB	OB750B	Bronze	1 1/2	90 (340)	82	25	3,450	20

12500 South Pulaski Road - Alsip, IL 60803

Phone (800) 448.1668

www.oberdorferpumps.com

**OBARDORFER®**

An Ingersoll Rand Business

Pump Selection Chart Flyer

FLEXIBLE IMPELLER PUMPS

Model	Ports	Max Capacity	Max Head		Max Speed
Pedestal	Size-Inches	GPM (lpm)	Feet	PSIG	RPM
OBN200M	3/8	5 (19)	49	21	3,000
OB301M	3/4	21 (79)	81	35	3,450
OB401M	1	36 (136)	92	40	3,000
OB501M	1 1/4	58 (219)	104	45	1,750



Model	Ports	Max Capacity	Max Head		Max Speed	Mounting			
Flange	Size-Inches	GPM (lpm)	Feet	PSIG	RPM	Flange	Cam	Shaft	Pilot
OB402M	1 1/4 Hose	36 (136)	80	35	3,000	Pulley			
OBN202M-908, OB837	1/2	12 (45)	58	25	3,500	Clamped			Male
OBN202M	1/2	12 (45)	58	25	3,500	2 bolt	Full	Slot	None
OBN202M-03	3/8	9 (34)	58	25	3,500	2 bolt	Half	Slot	None
OBN202M-07	3/8	12 (45)	58	25	3,500	2 bolt	Full	Slot	None
OBN202M-11	1 Hose	12 (45)	58	25	3,500	4 bolt	Full	Tang	Male
OBN202M-15	3/8	12 (45)	58	25	3,500	5 bolt	Full	Tang	Male
OBN202M-16	1/2	12 (45)	58	25	3,500	5 bolt	Full	Tang	Male
OBN202M-17	3/4 x 5/8	12 (45)	58	25	3,500	3 bolt	Full	Tang	Male
OBN202M-17P	3/4 x 5/8	12 (45)	58	25	3,500	2 bolt	Full	Tang	Male
OBN202M-21	1/2	12 (45)	58	25	3,500	4 bolt	Full	Round	Male
OBN202M-23	1/2	12 (45)	58	25	3,500	2 bolt	Full	Tang	Male
OBN202M-24	1/2	12 (45)	58	25	3,500	3 bolt	Full	Tang	Male

Model	Ports	Max Capacity	Max Head		Max Speed
Close-Coupled	Size-Inches	GPM (lpm)	Feet	PSIG	RPM
OB209M	1 1/2 x 3/8	9 (34)	28	12	2,600
OB214M	1 1/2 x 3/8	13 (49)	69	30	3,450
OBN305M	3/4	13 (49)	80	35	1,200
OB405M-04	1	25 (94)	99	43	1,725
OB406M-04	1 1/2 x 1	25 (94)	99	43	1,725

12500 South Pulaski Road - Alsip, IL 60803

Phone (800) 448.1668

www.oberdorferpumps.com




OVERDORFER®

An Ingersoll Rand Business

Chemsteel Pump

SELECTION GUIDE

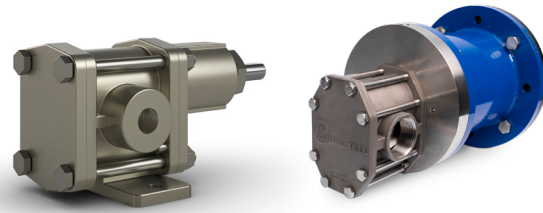

SEAL-LESS MAG DRIVE		SEALED		FLOW	MAX FLOW	PORT
CODE	* METAL	CODE	* METAL	RATE CODE	0 PSI GPM @ 1725 RPM	SIZE FNPT
RM1	×	R1	×	02	0.5	1/4"
	×		×	03	1.5	1/4"
	×		×	04	2	1/2"
	×		×	06	3	1/2"
SM2	×	S2	×	07	4	1/2"
	×		×	10	5.6	1/2"
	×		×	14	8	1/2"
SM4	×	S4	×	17	10	3/4"
SM9	×	S9	×	23	15	1-1/2"
	×		×	30	20	1-1/2"
	×		×	35	23	1-1/2"
	×		×	46	30	1-1/2"

*316 SST or Alloy C Material option

CHEMSTEEL PUMP SELECTION

- ▶ Select the MAX FLOW required
- ▶ Determine whether you will need a SEAL-LESS Mag Drive or SEALED Pump....notate code
- ▶ Select FLOW Rate Code
- ▶ e.g. 2 GPM with a SEALED Pump CODE of R1 would have a FLOW Rate Code of 04....
Base Model: R104
- ▶ e.g. 20 GPM with a SEAL-LESS Mag Drive Pump CODE of SM9 would have a
FLOW Rate Code of 30.... Base Model: SM930

This Selection will give you the Specification document for further discussion.



OBERDORFER[®]

An Ingersoll Rand Business

Chemsteel[®] Numbering System

Example

S20716CCB

- Additional Options
(Tandem, BSPT threads, Lower shaft, etc.)
- Shaft Seal Style, Materials
- Bearing Material Carbon Graphite
- Gear Material Combination W88
- Housing and Shaft Material 316 SS
- Flow Rate 07 (4 gpm @ 1725)
- Basic Pump Series S2

1. Basic Pump Series

SEAL-LESS MAG-DRIVE		SEALED	Flow Rate Code	Max Flow (0 psi) GPM @ 1725 RPM
Code	Metal	Code		
RM1	X	R1	02	.5
	X		03	1.5
	X		04	2
	X		06	3
SM2	X	S2	07	4
	X		10	5.6
	X		14	8
SM4	X	S4	17	10
SM9	X	S9	23	15
	X		30	20
	X		35	23
	X		46	30

2. Housing and Shaft Material

CODE	HOUSING MATERIAL	SHAFT MATERIAL
1	316 Stainless Steel	316 Stainless Steel
3	Alloy C	Alloy C

Teflon[®] is a registered trademark of DuPont, an equivalent fluoropolymer may be used
 Ryton[®] is a registered trademark of Chevron Phillips Chemical, an equivalent polyphenylenesulfide may be used
 Peek[®] is a registered trademark of Victrex, an equivalent polyetheretherketone may be used
 Grafoil[®] is a registered trademark of UCAR Carbon Technology, an equivalent may be used
 Viton[®] is a registered trademark of DuPont Dow Elastomers, an equivalent fluoroelastomer may be used
 Kalrez[®] is a registered trademark of DuPont Dow Elastomers, an equivalent perfluoroelastomer may be used
 Rulon[®] is a registered trademark of Saint-Gobain, an equivalent compounded PTFE based material may be used

3. Gear Material Combination

CODE	DRIVE	IDLE
1	RYTON [®]	RYTON [®]
2	316 SS	PEEK [®]
3	PEEK [®]	PEEK [®]
4	Alloy C	Alloy C
5	Alloy C	Teflon [®]
6	W88	W88
7	Teflon [®]	Teflon [®]
8	W88	Teflon [®]
9	Alloy C	PEEK [®]
A	Alloy C	RYTON [®]
B	316 Stainless Steel	RYTON [®]
C	W88	RYTON [®]
D	W88	316 Stainless Steel
E	316 Stainless Steel	316 Stainless Steel
F	316 Stainless Steel	Teflon [®]
H	W88	PEEK [®]

4. Bearing Material

CODE	MATERIAL
C	Carbon Graphite Resin
P	Teflon [®]
J	Rulon [®]

5. Shaft Seal

CODE	STYLE			MATERIAL			
				Rotary Head	Stationary Head		
	Design	Seals	Case	Face	Elastomer	Face	O-Ring
B	Bellows	Single	316	Carbon	Viton [®]	Ceramic	Viton [®]
J	Bellows	Single	316	Silicon Carbide	EPDM	Silicon Carbide	EPDM
H	Bellows	Double	316	Teflon [®]	Viton [®]	Ceramic	Viton [®]
Z	Bellows	Single	316	Silicon Carbide	Viton [®]	Silicon Carbide	Viton [®]
A	Wedge	Single	316	Carbon	Teflon [®]	Ceramic	Kalrez [®]
C	Wedge	Single	316	Carbon	Teflon [®]	Silicon Carbide	Kalrez [®]
D	Wedge	Single	Alloy C	Carbon	Teflon [®]	Ceramic	Kalrez [®]
F	Wedge	Single	Alloy C	Carbon	Teflon [®]	Silicon Carbide	Kalrez [®]
V	Wedge	Single	Alloy C	Silicon Carbide	Teflon [®]	Silicon Carbide	Kalrez [®]
G	Wedge	Double	316	Carbon	Teflon [®]	Silicon Carbide	Kalrez [®]
L	Two Lips Seals		304	Viton [®] Backed By Teflon [®]			
W	Mag-Coupled			Samarium Cobalt			

6. Additional Options

CODE	OPTION
C1 through C7	Factory Installed Options
T1 through T13	Non-Metallic Gear • Temperature Trim
B	Bearing Flush Ports
E	BSPT Threads
XX	Specials - Consult Factory
M1 -M7	Factory Installed Close Coupled Adapter - Mag-Coupled

12500 South Pulaski Road - Alsip, IL 60803

Phone (800) 448.1668

www.oberdorferpumps.com




OBBERDORFER®

An Ingersoll Rand Business

Bronze Gear Pump Modeling System

CLOSE COUPLED – Part Number Code

Example: OBN991R55Q-T97, OBN992-01, OBN999Q-F50




OBN991R00S5Q-T97

MANDATORY PREFIX	INDICATES BRONZE GEAR PUMP*	MODEL (FLOW)	OPTIONS**	OTHER	SEAL**	MOTOR ADAPTER CODE	MOTOR CODE
OB	N	991 (2 GPM) 992 (4 GPM) 993 (8 GPM) 994 (10 GPM) 970 (20 GPM) 990 (23 GPM) 999 (1 GPM)	R RELIEF VALVE E EXPORT THREAD (BSPT)	01 ONE SIZE LARGER PORTS 02 ONLY WITH "R", OPPOSITE RELIEF	— (BLANK) BUNA LIP S5 VITON LIP S8 PTFE WEDGE S15 HIGH PRESSURE VITON LIP SEAL S16 MECH. SEAL, BUNA S17 MECH. SEAL, VITON S18 MECH. SEAL, TEFLON	J, Q, N, M, K, H, C RELATES TO MOTOR FRAME SIZE SEE DATA SHEET FOR PROPER ADAPTER SELECTION TO MOTOR FRAME SIZE	- LETTER/NUMBER/ NUMBER

**LEAVE BLANK AND MOVE ON IF NO OPTIONS

PEDESTAL – Part Number Code

Example: OBN3000LRS15-01, OBN2000RS17-02, OBN1000RS17



OBN1000LRES3-01

MANDATORY PREFIX	INDICATES BRONZE GEAR PUMP*	MODEL (FLOW)	NOT NORMALLY USED	GEAR MATERIAL	OPTIONS	SEAL	OTHER
OB	N	1 (2 GPM) 2 (4 GPM) 3 (8 GPM) 4 (10 GPM) 7 (20 GPM) 9 (23 GPM) 11 (40 GPM) 13 (60 GPM) 26 (170 GPM)		00 STANDARD BOTH BRONZE 11 BOTH RYTON GEARS* 22 RYTON IDLE GEAR* *RYTON GEARS AVAILABLE ON MODELS 1,2,4 ONLY!	L LUBRICATED (BRONZE BEARINGS) R RELIEF VALVE E EXPORT THREAD (BSPT) P PEEK BEARING	— (BLANK) PTFE PACKING S3 BUNA LIP S5 VITON LIP S8 PTFE WEDGE S15 HIGH PRESSURE VITON LIP SEAL S16 MECH. SEAL, BUNA S17 MECH. SEAL, VITON S18 MECH. SEAL, TEFLON	-01 ONE SIZE LARGER PORTS -02 ONLY WITH "R", OPPOSITE RELIEF

12500 South Pulaski Road - Alsip, IL 60803

Phone (800) 448.1668

www.oberdorferpumps.com



Experience the Power of Ingersoll Rand's Flow Control Brands:

MP Pumps and Oberdorfer Pumps are a proud part of the Precision & Science Technologies segment of Ingersoll Rand – representing a broad portfolio of industry-leading brands that facilitate precision dosing and transfer of high-value fluids using positive displacement technology.

Precision and Science Technologies Portfolio



Industry leading brands and technologies serving mission-critical applications

Precision & Science Technologies consists of a broad range of positive displacement technologies including metering, dosing and transfer pumps for multi-industry use and specialized gas and liquid pumps for medical, lab and life-science applications. Combined, our brands and product technologies serve niche, mission critical applications.



12500 South Pulaski Road - Alsip, IL 60803
Phone (800) 448.1668
www.oberdorferpumps.com



©2023 Ingersoll Rand MPOB-1123-011 EN