




OBERDORFER[®]

An Ingersoll Rand Business

N13HD Series Bronze Pedestal Rotary Gear Pumps

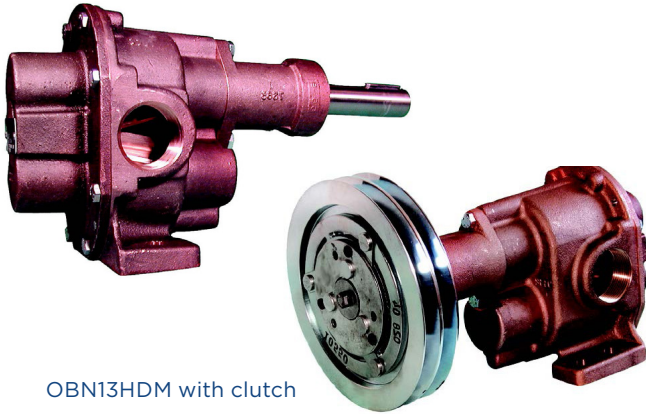


OBN13HDM with clutch

Features

- 1-1/2" NPT Ports
- Temp. Range: -40°F - 400°F
- All Bronze Castings and Stainless Steel Shafts
- Sealing Arrangement Interchangeable in Field with Proper Kit
- Outboard Ball Bearing Support for Belt Drive Applications
- Self Lubricating Carbon Bearings
- Please be advised that Oberdorfer has discontinued the supply of clutches. The clutch-ready configuration is available under model OBN13HDM-06

Model	Seal		Conversion Kit
	Type	Material	
OBN13HDP	Packing	Acrylic-Graphite	OB11021
OBN13HDL	Lip	FKM-PTFE	OB11023
OBN13HDM	Mechanical	NBR-Ceramic	OB11025
OBN13HDLS3	Lip	NBR	OB11024
OBN13HDMS3	Mechanical	FKM-Ceramic	OB11026
OBN13HDMS8	Mechanical	EPDM	TBD

Performance

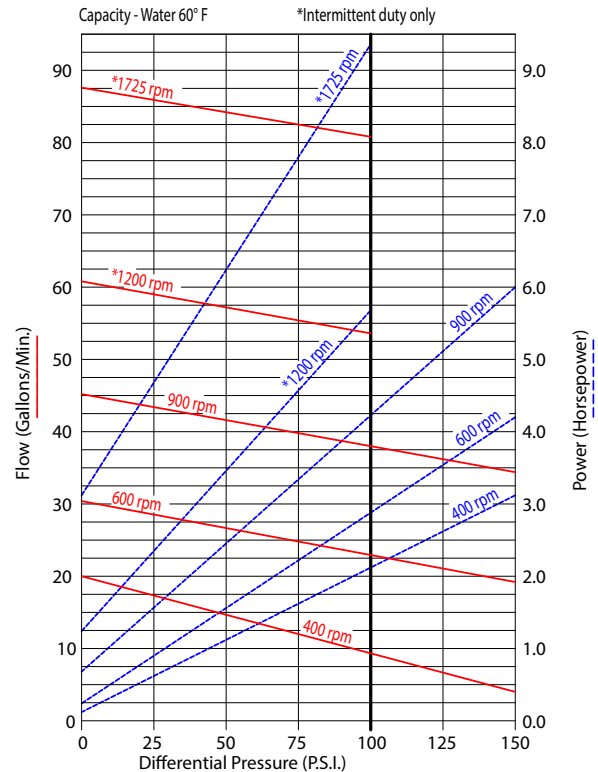

Service Wear Factors

Speed - High speed accelerates wear. For longer service life keep speed as low as possible. Pump speeds above 900 RPM not recommended except for intermittent duty and pressures below 100 psi.

Pressure - High pressure accelerates wear. For longer service life keep pressure as low as possible.

Liquid Temperature - High temperature accelerates wear. Keep as close to room temperature as possible.

Liquid Contamination - Impurities like fine abrasive silt or sand accelerate wear. Keep liquid as clean as possible.

Liquid Lubricity - Lubricants increase service life many fold. Use lubricant additives whenever possible.

Noise - Large gear pumps are inherently noisy due to metal to metal gear contact. Make installations far removed from offices or other relatively quiet people areas. Some noise reduction can be realized by lowering pump speed and use of isolation mounts and lines, usually the small amount of noise reduction achieved does not justify the effort and expense.



OBERDORFER®

An Ingersoll Rand Business

Service Wear Factors (contd.)


Drive & Alignment - Direct drive is the recommended drive arrangement. This pump is suitable for belt drive applications without needing pillow block bearings to achieve acceptable pump life. Correct alignment is absolutely essential for satisfactory pump life. Recheck alignment after piping has been connected to the pump. Electric clutch versions available.

Seal Conversion Kits

Seal conversion kits illustrated (on back) are designed for quick removal and replacement. In each case, seal housings are fastened to pump bodies by means of 2 bolts, item 13.

IMPORTANT: Before attempting to remove a seal housing containing seal components by sliding them off the pump shaft, be sure to unlock 2 set screws locking the ball bearing inner race to the pump shaft. The ball bearing is identified as item 20. Also, before attempting to slide the seal housing from the pump shaft, remove all burrs, scale, and projections that could be formed by fretting corrosion.

Dimensions

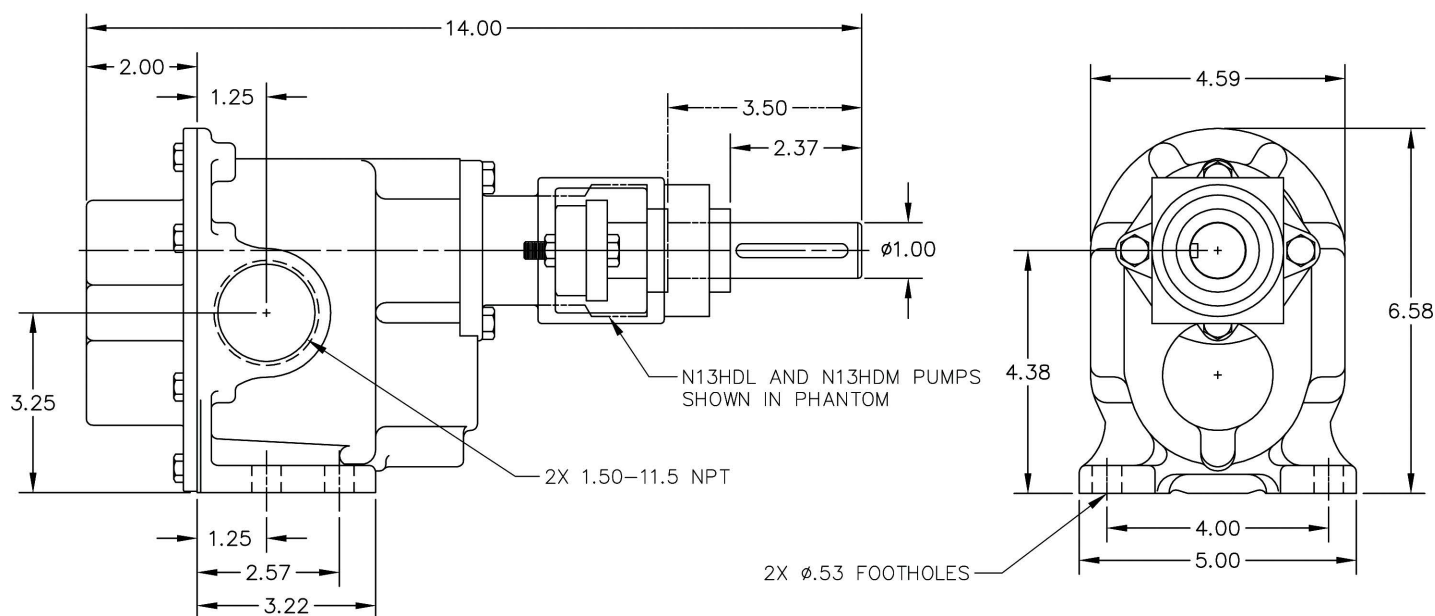

Clutch Drive Options

Model	Clutch Drive Options	Clutch Coil	Clutch Assembly	Pump Repair Kit	7	17
					Drive Shaft	Seal Housing
					Qty. 1	Qty. 1
OBN13HDM-E12	Gear Pump, Mechanical Seal with 12V Clutch	OB7224	OB32238	OB12029	OB9168-1	OB9169-1
OBN13HDM-E24	Gear Pump, Mechanical Seal with 24V Clutch	OB9902	OB33066		OB9168-1	OB9169-1
OBN13HDM-E32	Gear Pump, Mechanical Seal with 32V Clutch	OB7225	OB32239		OB9168-1	OB9169-1




12500 South Pulaski Road
Alsip, IL 60803, USA
Phone (800) 448.1668



OBERDORFER®

An Ingersoll Rand Business

Exploded View

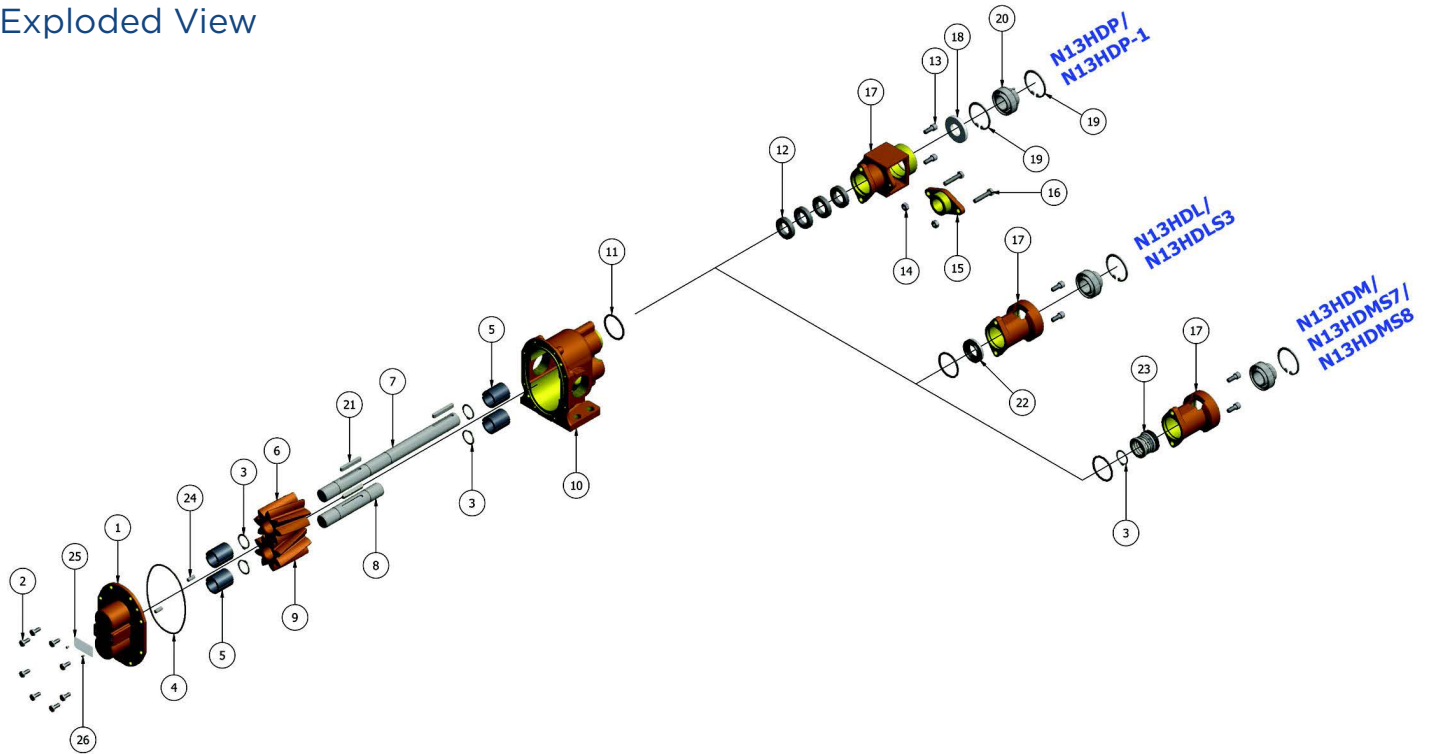

	1	2	3	4	5	6	7	8	9	10	11	12	13
	Cover	Screw	Snap Ring	O-Ring	Bearing	Drive Gear	Drive Shaft	Idle Shaft	Idle Gear	Body	O-Ring	Packing Ring	Screw
Model	Qty. 1	Qty.8	Qty.4/5	Qty. 1	Qty. 4	Qty. 1	Qty. 1	Qty. 1	Qty. 1	Qty. 1	Qty. 1	Qty. 4	Qty. 2
OBNI3HDP	OB9333NN5N	OB5393	OB7651 (4 Req'd)	OB9797-158	OB5108	OB9854	OB7570	OB7653	OB9855	OB9332NH7N	OB6515	OB7624	OB6827
OBNI3HDL	OB9333NN5N	OB5393	OB7651 (4 Req'd)	OB9797-158	OB5108	OB9854	OB7570	OB7653	OB9855	OB9332NH7N	OB9797-224	N/A	OB6827
OBNI3HDLS3	OB9333NN5N	OB5393	OB7651 (4 Req'd)	OB9797-158	OB5108	OB9854	OB7570	OB7653	OB9855	OB9332NH7N	OB6515	N/A	OB6827
OBNI3HDM	OB9333NN5N	OB5393	OB7651 (5 Req'd)	OB9797-158	OB5108	OB9854	OB7570	OB7653	OB9855	OB9332NH7N	OB6515	N/A	OB6827
OBNI3HDM-O6													
OBNI3HDS7	OB9333NN5N	OB5393	OB7651 (5 Req'd)	OB9797-158	OB5108	OB9854	OB7570	OB7653	OB9855	OB9332NH7N	OB9797-224	N/A	OB6827
OBNI3HDS8	OB9333NN5N	OB5393	OB7651 (5 Req'd)	OB9999-158	OB5108	OB9854	OB7570	OB7653	OB9855	OB9332NH7N	OB6515	N/A	OB6827

	14	15	16	17	18	19	20	21	22	23	24	25	26	Repair Kit
	Nut	Gland	Screw	Seal Housing	Lip Seal	Snap Ring	Ball Bearing	Key	Lip Seal	Seal Assy	Dowel Pin	Tag	Tag Screw	
Model	Qty. 2	Qty. 1	Qty. 2	Qty. 1	Qty. 1	Qty. 1/2	Qty. 1	Qty. 3	Qty. 1	Qty. 1	Qty. 2	Qty. 1	Qty. 2	
OBNI3HDP	OB8395	OB7451	OB9905	OB7449	OB6710	OB7372 (2 Req'd)	OB7368	OB6518	N/A	N/A	OB8597	OB9344	OB9345	OB11009
OBNI3HDL	N/A	N/A	N/A	OB7365	N/A	OB7372 (1 Req'd)	OB7368	OB6518	OB7262	N/A	OB8597	OB9344	OB9345	OB11011
OBNI3HDLS3	N/A	N/A	N/A	OB7365	N/A	OB7372 (1 Req'd)	OB7368	OB6518	OB6500	N/A	OB8597	OB9344	OB9345	OB11012
OBNI3HDM	N/A	N/A	N/A	OB7365	N/A	OB7372 (1 Req'd)	OB7368	OB6518	N/A	OB32315	OB8597	OB9344	OB9345	OB11013
OBNI3HDM-O6														
OBNI3HDS7	N/A	N/A	N/A	OB7365	N/A	OB7372 (1 Req'd)	OB7368	OB6518	N/A	OB32372	OB8597	OB9344	OB9345	OB11014
OBNI3HDS8	N/A	N/A	N/A	OB7365	N/A	OB7372 (1 Req'd)	OB7368	OB6518	N/A	OB33335	OB8597	OB9344	OB9345	TBD

Repair kit contain items 3, 4, 5, 6, 7, 8, 9, 11, 12, 18, 22 & 23



12500 South Pulaski Road
Alsip, IL 60803, USA
Phone (800) 448.1668